


PLEASE ALSO REFER TO TREE SURVEY AND ARBORICULTURAL IMPACT ASSESSMENT

TREE PROTECTION

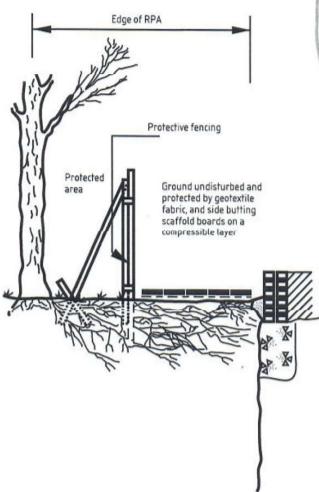


New walls
Walls to be demolished
Proposed new work

TREE PROTECTION

- The slope of ground should be taken into account so no material runs towards tree
- Notice boards, cables or other services should not be attached to tree
- Care should be taken when planning site to ensure wide or tall loads do not come into contact with retained tree

TREE PROTECTION

- 2m high Heras fencing to be provided around tree and must be in place until all construction and hard surfacing is complete
- No work to take place within fenced off area
- Materials must be stored on existing hard surface and provision for spillage must be made
- Cement/concrete mixing must take place over a suitable hard surface away from treezone

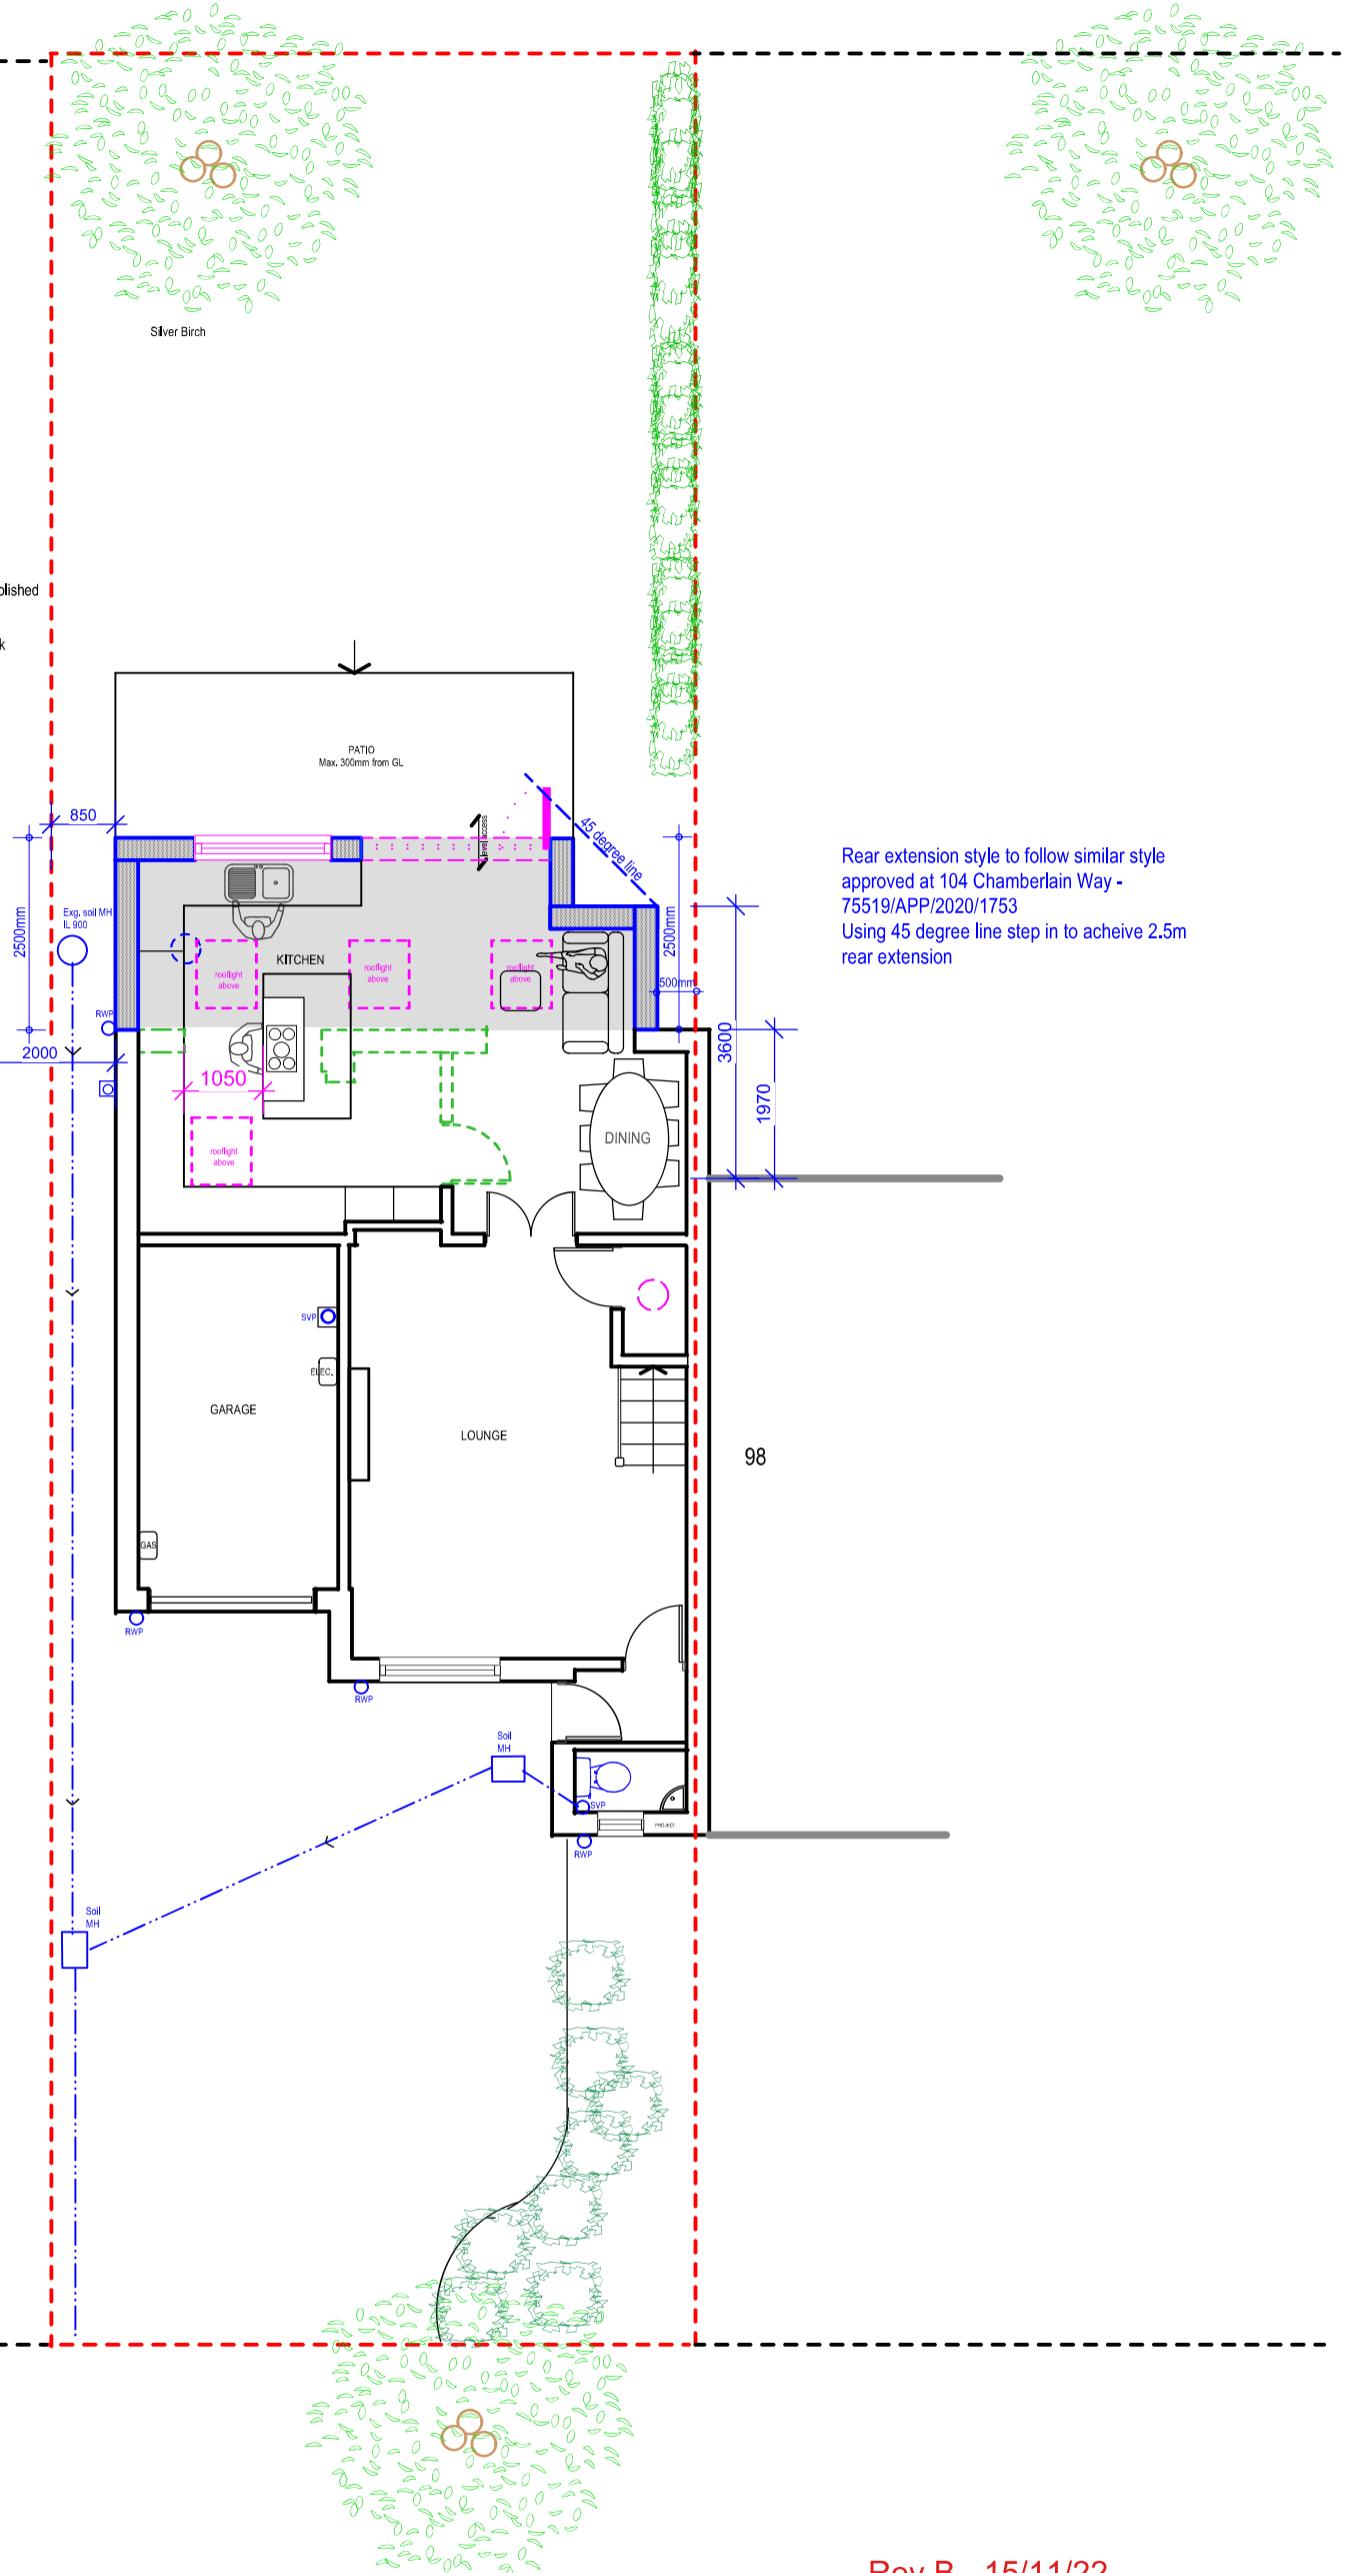

Rev B - 15/11/22
Rear extension revised

Rev A - 18/08/22
Tree protection added

Purpose - Householder planning application only

All dimensions to be checked on site. All omissions & discrepancies to be reported to the designer.	PROJECT: 100 Chamberlain Way, Pinner, HA5 2AT	DATE: 16/06/2022
(C) SSK architects owns the copyright of this drawing which must not be reproduced in whole or part without the written permission.	DWG. TITLE: GROUND FLOOR	REVISION: 08 B

