



# GMG ROOF EXPERTS

No Job too Big or Small

270 High St, Harlington, Hayes, UB3 5DD


30/07/2023

MR SACHIN,

Hi separately attached is another document which shows which rafters need to get changed. I have attached a video in which it shows the 4 rafters in line which need changing. Which are the most damaged there is a few in the rear which have cracks in the rafters which are small which could still be safe having the at the rear but the ones at the front which I have attached a video to have the most damage to the rafters.

Points raised by the architect:

Below is information regarding LOVAT the Slates which we would be using for the dwelling,

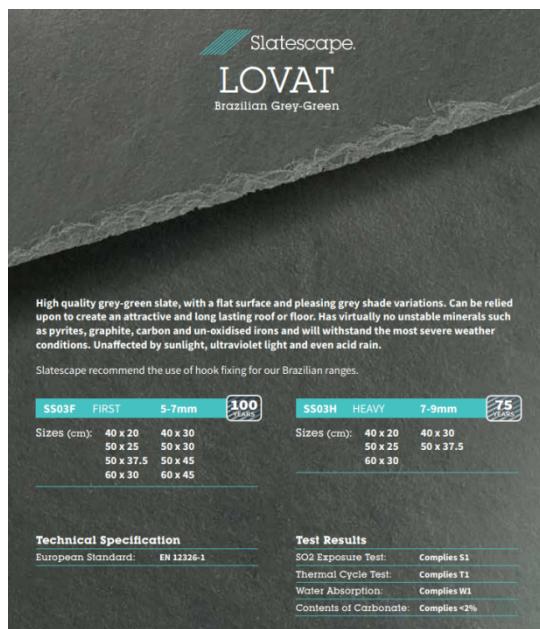

There will be also be Redland Clay Plain Tiles.

Redland Rosemary Clay Classic Roof Tile Smooth

BBA certified.

Rosemary Clay Classic Plain Tiles conform to BS EN 1304

With regard to the RoofLITE Fenstro 45cm x 55cm Skylight Roof light With Integrated Flashing I have on the drawing which you attached drawn showing where in the proximity the Roof light would be installed in the dwelling .

With regards to the raised Question with the Blue Treated Battens. There is no Specific Brand but the following is the code of practise for the Blue Treated Battens  
British Standards BS5534

## Galvanized Large Hip Iron

**Code:** NLHIP  
**Brand:** Roofing Superstore

 ★★★★★ 1 Review

Galvanized Large Hip Iron (300mm x 150mm x 25mm x 3mm) [Read More](#)

[View full product details](#)

[Ask a question about this product](#)





**BMI Redland**

### Redland Concrete Half Round Ridge - Brown 02

Product Code: 10002476

SKU: SKU4514



A half round ridge tile from BMI Redland can be dry fixed, mortar bedded only, or mortar bedded and mechanically fixed. Whenever half round ridge tiles are mortar bedded and mechanically fastened, neoprene washers and foam grommets should be used along with Clamping Plates and woodscrews. The half round ridge tiles can be used both on the ridge and hip of the roof. Generally, they are used on interlocking



## **Novia Black Roof & Wall Breather**



- 3-layer polypropylene & microporous film laminate
- Very high breathability
- UKCA compliant to EN 13859-1 (roofs) & EN 13859-2 (walls)
- Excellent waterproofing properties
- Roll size 1.5m x 50m
- Grade E flame resistant to EN 13501-1

**I hope this is sufficient information you requested.**

**Thank You**