


Astral Sign Application Form

Both Signs illuminance consists from LED originating from inside the signage box coming out via an opal acrylic through the sides of the logo and lettering, as example, giving a night illuminance of 300 cd/m². The proposed LED signage is smaller than 10m² and these are to be located within an E3 or E4 Environmental Zone. Therefore, the recommended maximum sign luminance in accordance with the criterion outlined in PLG 05 is 300 cd/m² and 600 cd/m² respectively.

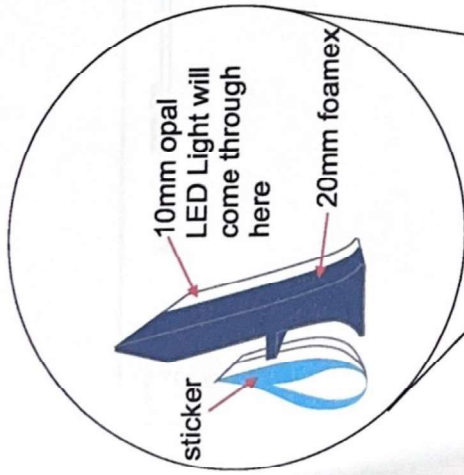

Main Sign

Brushed Silver Aluminium Composite



Projection Sign
90x60cm



LED Light will come from the letters

