


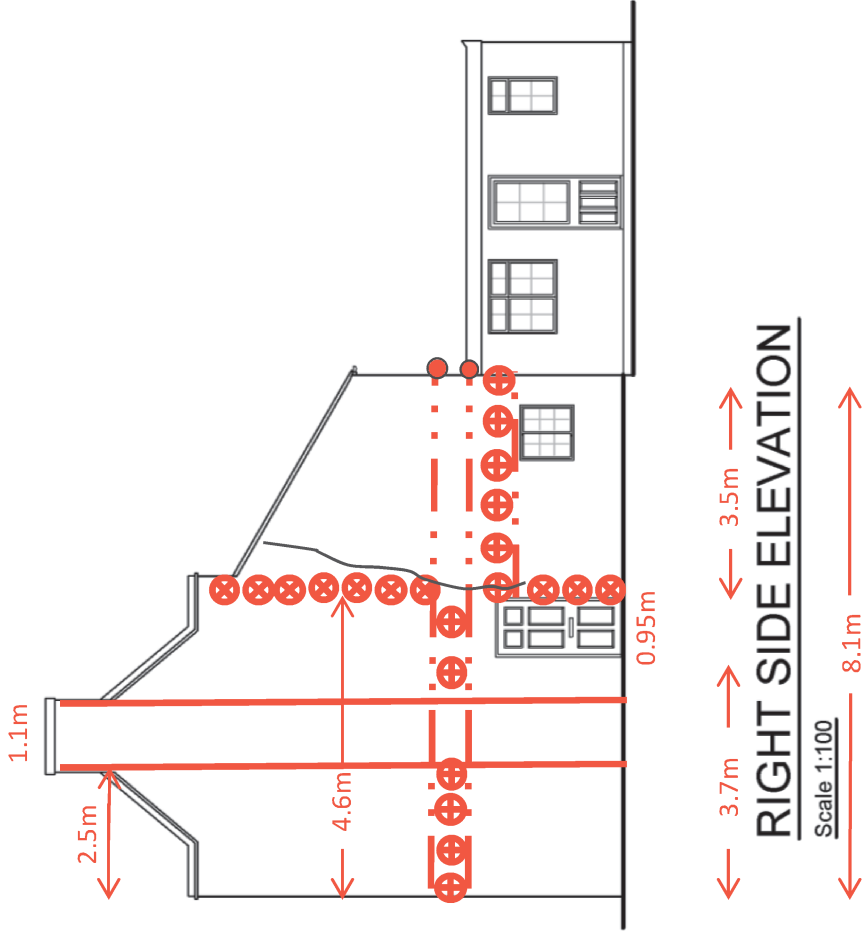

Helibeam at floor levels, wrapped around rear elevation.
BowTie HD's into floors.
CemTies into spine walls.
Localised rebuild and crack stitching of the 50mm crack required.
Cracked bricks to be repaired / replaced.

Project: 69 The Green, West Drayton, UB7 7PW

Title: Proposed Repair

Date:
09.06.23

By: Vince West

Single HeliBar

Twin HeliBar

CemTie

BowTie

Wall Tie