


The Star, Uxbridge Road,
Uxbridge,
UB10 0LY


Dwelling type: Flat, Semi-Detached
Date of assessment: 05/05/2023
Produced by: Paul Whiffin
Total floor area: 52.99 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

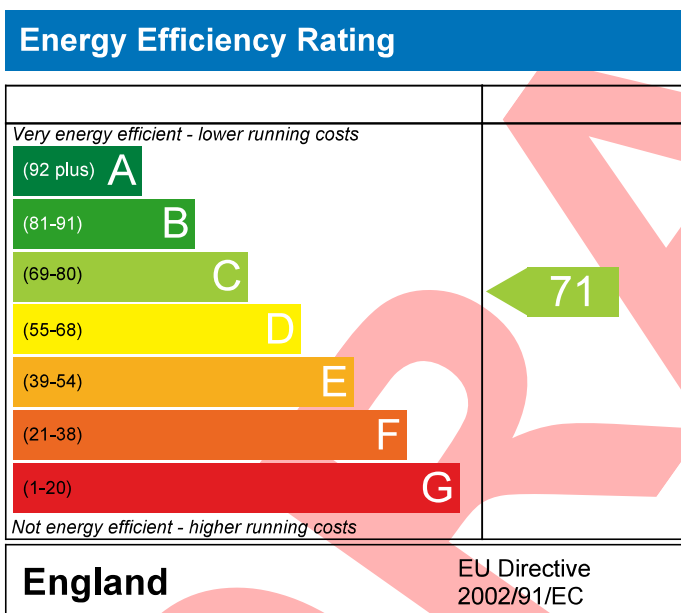

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

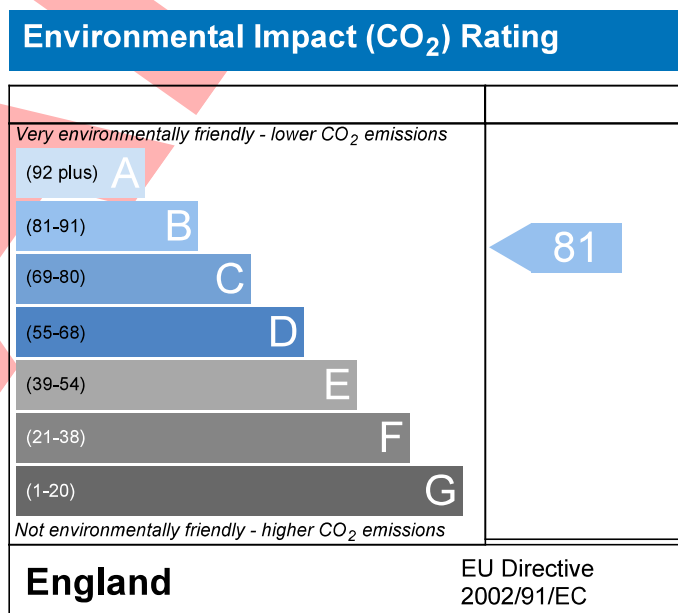

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

BUILDING REGULATION COMPLIANCE

Calculation Type: New Build (As Designed)

Property Reference	Q-03466 APT.04				Issued on Date	05/05/2023
Assessment Reference	Design V4			Prop Type Ref	New Build	
Property	The Star, Uxbridge Road, Uxbridge, UB10 0LY					
SAP Rating	71 C	DER	30.62	TER	35.30	
Environmental	81 B	% DER<TER	13.27			
CO ₂ Emissions (t/year)	1.27	DFEE	62.70	TFEE	70.91	
General Requirements Compliance	Pass	% DFEE<TFEE	11.58			
Assessor Details	Mr. Paul Whiffin, Paul Whiffin, Tel: 01763 268685, energy@atspaceltd.com				Assessor ID	y314-0001
Client	Harjeet Suri, 33244					

SUMMARY FOR INPUT DATA FOR New Build (As Designed)

Criterion 1 – Achieving the TER and TFEE rate

1a TER and DER

Fuel for main heating	Electricity		
Fuel factor	1.55 (electricity)		
Target Carbon Dioxide Emission Rate (TER)	35.30	kgCO ₂ /m ²	
Dwelling Carbon Dioxide Emission Rate (DER)	30.62	kgCO ₂ /m ²	Pass
	-4.68 (-13.3%)	kgCO ₂ /m ²	

1b TFEE and DFEE

Target Fabric Energy Efficiency (TFEE)	70.91	kWh/m ² /yr	
Dwelling Fabric Energy Efficiency (DFEE)	62.70	kWh/m ² /yr	
	-8.2 (-11.6%)	kWh/m ² /yr	Pass

Criterion 2 – Limits on design flexibility

Limiting Fabric Standards

2 Fabric U-values

Element	Average	Highest	
External wall	0.13 (max. 0.30)	0.13 (max. 0.70)	Pass
Party wall	0.00 (max. 0.20)	-	Pass
Floor	0.18 (max. 0.25)	0.18 (max. 0.70)	Pass
Openings	1.24 (max. 2.00)	1.80 (max. 3.30)	Pass

2a Thermal bridging

Thermal bridging calculated from linear thermal transmittances for each junction

3 Air permeability

Air permeability at 50 pascals	3.00 (design value)	m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0	m ³ /(h.m ²) @ 50 Pa	Pass

Limiting System Efficiencies

4 Heating efficiency

Main heating system	Boiler system with radiators or underfloor - Electric Direct-acting boiler	
Secondary heating system	None	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

BUILDING REGULATION COMPLIANCE

Calculation Type: New Build (As Designed)

5 Cylinder insulation

Hot water storage

Measured cylinder loss: 1.90 kWh/day
Permitted by DBSCG 2.24

Pass

Primary pipework insulated

No primary pipework

6 Controls

Space heating controls

Time and temperature zone control

Pass

Hot water controls

Cylinderstat

Pass

7 Low energy lights

Percentage of fixed lights with low-energy fittings

100 %

Minimum

75 %

Pass

8 Mechanical ventilation

Continuous supply and extract system

Specific fan power

0.62

Maximum

1.5

Pass

MVHR efficiency

94 %

Minimum

70 %

Pass

Criterion 3 – Limiting the effects of heat gains in summer

9 Summertime temperature

Overheating risk (Thames Valley)

Medium

Pass

Based on:

Overshading

Average

Windows facing North

18.12 m², No overhang

Windows facing East

7.84 m², No overhang

Air change rate

6.00 ach

Blinds/curtains

None

Criterion 4 – Building performance consistent with DER and DFEE rate

Party Walls

Type

U-value

Filled Cavity with Edge Sealing

0.00

W/m²K

Pass

Air permeability and pressure testing

3 Air permeability

Air permeability at 50 pascals

3.00 (design value)

m³/(h.m²) @ 50 Pa

Maximum

10.0

m³/(h.m²) @ 50 Pa

Pass

10 Key features

External wall U-value

0.13

W/m²K

External wall U-value

0.13

W/m²K

Party wall U-value

0.00

W/m²K

Air permeability

3.0

m³/m²h

Photovoltaic array

938.05

kWh/Year

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

SUMMARY FOR INPUT DATA

Calculation Type: New Build (As Designed)

Property Reference	Q-03466 APT.04				Issued on Date	05/05/2023
Assessment Reference	Design V4	Prop Type Ref	New Build			
Property	The Star, Uxbridge Road, Uxbridge, UB10 0LY					
SAP Rating	71 C	DER	30.62	TER	35.30	
Environmental	81 B	% DER<TER	13.27			
CO ₂ Emissions (t/year)	1.27	DFEE	62.70	TFEE	70.91	
General Requirements Compliance	Pass	% DFEE<TFEE	11.58			
Assessor Details	Mr. Paul Whiffin, Paul Whiffin, Tel: 01763 268685, energy@atspaceltd.com				Assessor ID	y314-0001
Client	Harjeet Suri, 33244					

SUMMARY FOR INPUT DATA FOR: New Build (As Designed)

Orientation	South
Property Tenure	Unknown
Transaction Type	New dwelling
Terrain Type	Suburban
1.0 Property Type	Flat, Semi-Detached
2.0 Number of Storeys	1
3.0 Date Built	2022
4.0 Sheltered Sides	2
5.0 Sunlight/Shade	Average or unknown

6.0 Measurements

	Ground Floor:	Heat Loss Perimeter	Internal Floor Area	Average Storey Height
		26.73 m	52.99 m²	2.52 m
7.0 Living Area	24.10	m²		
8.0 Thermal Mass Parameter	Simple calculation - Medium			
Thermal Mass	250.00	kJ/m²K		

9.0 External Walls

Description	Type	U-Value (W/m ² K)	Gross Area (m ²)	Nett Area (m ²)
External Wall	Cavity Wall	0.13	54.76	26.71
Sheltered Wall	Cavity Wall	0.13	12.60	12.60

9.1 Party Walls

Description	Type	Construction	U-Value (W/m ² K)	Area (m ²)
Party Wall 1	Filled Cavity with Edge Sealing		0.00	23.81

11.0 Heat Loss Floors

Description	Type	Construction	U-Value (W/m ² K)	Area (m ²)
Exposed Floor	Exposed Floor - Solid		0.35	52.99

12.0 Opening Types

Description	Data Source	Type	Glazing	Glazing Gap	Argon Filled	G-value	Frame Type	Frame Factor	U Value (W/m ² K)
Glazing	BFRC data	Window	Double Low-E Soft 0.1			0.50			1.20
Solid Door	Manufacture r	Door to Corridor							1.80

SUMMARY FOR INPUT DATA

Calculation Type: New Build (As Designed)

13.0 Openings

Name	Opening Type	Location	Orientation	Curtain Type	Overhang Ratio	Wide Overhang	Width (m)	Height (m)	Count	Area (m²)	Curtain Closed
FSD	Door to Corridor	[1] External Wall	South							2.09	
RW	Window	[1] External Wall	North	None	0.00					18.12	
RSW	Window	[1] External Wall	East	None	0.00					7.84	

14.0 Conservatory

15.0 Draught Proofing

%

16.0 Draught Lobby

17.0 Thermal Bridging

17.1 List of Bridges

Source Type	Bridge Type	Length	Psi	Imported	Reference:
Independently assessed	E2 Other lintels (including other steel lintels)	11.85	0.040	No	LABC
Independently assessed	E3 Sill	10.85	0.027	No	LABC
Independently assessed	E4 Jamb	28.10	0.029	No	LABC
Table K1 - Default	E20 Exposed floor (normal)	26.73	0.320	No	LABC
Independently assessed	E7 Party floor between dwellings (in blocks of flats)	26.73	0.039	No	
Independently assessed	E16 Corner (normal)	7.56	0.050	No	LABC
Independently assessed	E17 Corner (inverted – internal area greater than external area)	2.52	-0.091	No	
Table K1 - Default	E25 Staggered party wall between dwellings	5.04	0.120	No	
Table K1 - Default	P2 Party wall - Intermediate floor within a dwelling	9.45	0.000	No	
Table K1 - Default	P8 Party Wall - Exposed floor (inverted)	9.45	0.240	No	LABC

Y-value W/m²K

18.0 Pressure Testing

Designed AP₅₀ m³/(h.m²) @ 50 Pa

Property Tested ?

As Built AP₅₀ m³/(h.m²) @ 50 Pa

19.0 Mechanical Ventilation

Summer Overheating

Windows open in hot weather

Cross ventilation possible

Night Ventilation

Air change rate

Mechanical Ventilation

Mechanical Ventilation System Present

Approved Installation

Mechanical Ventilation data Type

Type

MV Reference Number

Configuration

MVHR Duct Insulated

Manufacturer SFP

Duct Type

MVHR Efficiency

Wet Rooms

20.0 Fans, Open Fireplaces, Flues

SUMMARY FOR INPUT DATA

Calculation Type: New Build (As Designed)

	MHS	SHS	Other	Total
Number of Chimneys	0		0	0
Number of open flues	0		0	0
Number of intermittent fans				0
Number of passive vents				0
Number of flueless gas fires				0

21.0 Fixed Cooling System

22.0 Lighting

Internal

Total number of light fittings

Total number of L.E.L. fittings

Percentage of L.E.L. fittings %

External

External lights fitted

Light and motion sensor

23.0 Electricity Tariff

24.0 Main Heating 1

Percentage of Heat %

Main Heating

SAP Code

Efficiency (SAP Table) %

Controls

PCDF Controls

Delayed Start Stat

Sap Code

Is MHS Pumped

Heat Emitter

Underfloor Heating

25.0 Main Heating 2

Community Heating

28.0 Water Heating

Water Heating

Flue Gas Heat Recovery System

Waste Water Heat Recovery Instantaneous System 1

Waste Water Heat Recovery Instantaneous System 2

Waste Water Heat Recovery Storage System

Solar Panel

Water use <= 125 litres/person/day

SAP Code

Immersion Heater

29.0 Hot Water Cylinder

Cylinder In Heated Space

SUMMARY FOR INPUT DATA

Calculation Type: New Build (As Designed)

Insulation Type	Measured Loss	
Cylinder Volume	200.00	L
Loss	1.90	kWh/day
31.0 Thermal Store	None	
32.0 Photovoltaic Unit	More Dwellings, One Block	
Apportioned	938.05	kWh/Year

Recommendations

Lower cost measures

None

Further measures to achieve even higher standards

None