


The Star, Uxbridge Road,
Uxbridge,
UB10 0LY


Dwelling type: Flat, Semi-Detached
Date of assessment: 05/05/2023
Produced by: Paul Whiffin
Total floor area: 49.86 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

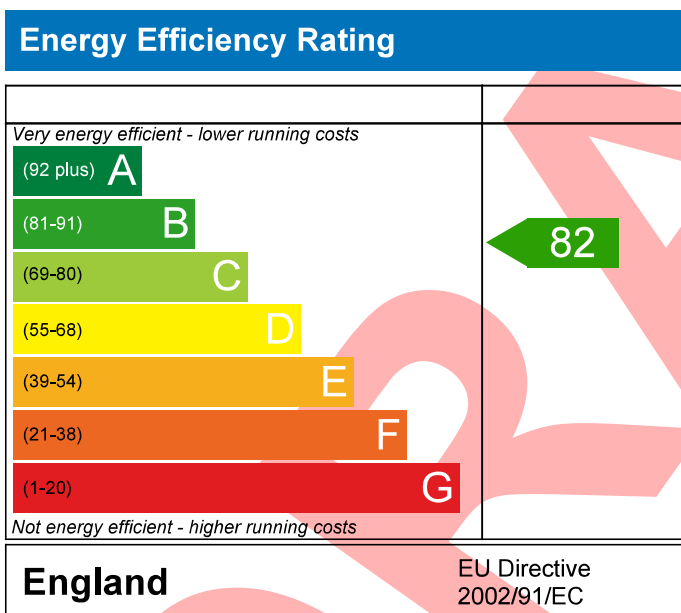

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

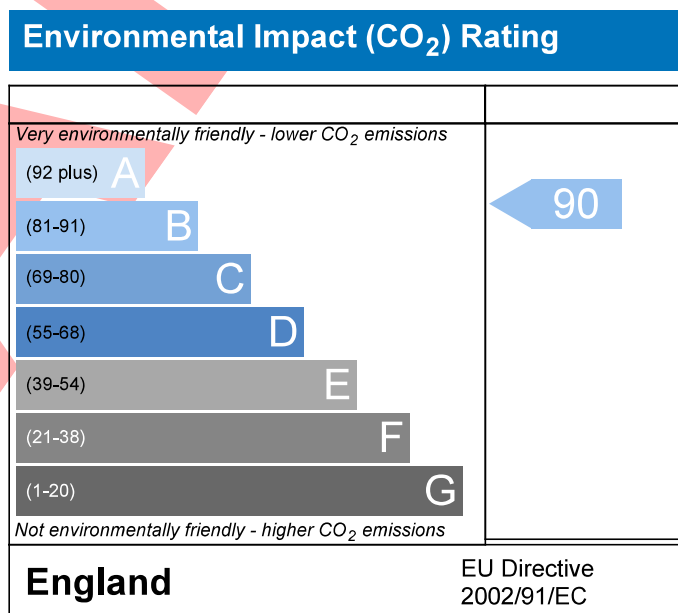

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

BUILDING REGULATION COMPLIANCE

Calculation Type: New Build (As Designed)

Property Reference	Q-03466 APT.05	Issued on Date	05/05/2023
Assessment Reference	Design V3	Prop Type Ref	New Build
Property	The Star, Uxbridge Road, Uxbridge, UB10 0LY		

SAP Rating	82 B	DER	15.29	TER	26.55
Environmental	90 B	% DER<TER	42.41		
CO ₂ Emissions (t/year)	0.64	DFEE	28.41	TFEE	39.37
General Requirements Compliance	Pass	% DFEE<TFEE	27.83		

Assessor Details	Mr. Paul Whiffin, Paul Whiffin, Tel: 01763 268685, energy@atspaceltd.com	Assessor ID	y314-0001
Client	Harjeet Suri, 33244		

SUMMARY FOR INPUT DATA FOR New Build (As Designed)

Criterion 1 – Achieving the TER and TFEE rate

1a TER and DER

Fuel for main heating	Electricity		
Fuel factor	1.55 (electricity)		
Target Carbon Dioxide Emission Rate (TER)	26.55	kgCO ₂ /m ²	
Dwelling Carbon Dioxide Emission Rate (DER)	15.29	kgCO ₂ /m ²	Pass
	-11.26 (-42.4%)	kgCO ₂ /m ²	

1b TFEE and DFEE

Target Fabric Energy Efficiency (TFEE)	39.37	kWh/m ² /yr	
Dwelling Fabric Energy Efficiency (DFEE)	28.41	kWh/m ² /yr	
	-11.0 (-27.9%)	kWh/m ² /yr	Pass

Criterion 2 – Limits on design flexibility

Limiting Fabric Standards

2 Fabric U-values

Element	Average	Highest	
External wall	0.13 (max. 0.30)	0.13 (max. 0.70)	Pass
Party wall	0.00 (max. 0.20)	-	Pass
Roof	0.12 (max. 0.20)	0.12 (max. 0.35)	Pass
Openings	1.26 (max. 2.00)	1.80 (max. 3.30)	Pass

2a Thermal bridging

Thermal bridging calculated from linear thermal transmittances for each junction

3 Air permeability

Air permeability at 50 pascals	3.00 (design value)	m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0	m ³ /(h.m ²) @ 50 Pa	Pass

Limiting System Efficiencies

4 Heating efficiency

Main heating system	Boiler system with radiators or underfloor - Electric Direct-acting boiler	
Secondary heating system	None	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

BUILDING REGULATION COMPLIANCE

Calculation Type: New Build (As Designed)

5 Cylinder insulation

Hot water storage

Measured cylinder loss: 1.90 kWh/day
Permitted by DBSCG 2.24

Pass

Primary pipework insulated

No primary pipework

6 Controls

Space heating controls

Time and temperature zone control

Pass

Hot water controls

Cylinderstat

Pass

7 Low energy lights

Percentage of fixed lights with low-energy fittings

100 %

Minimum

75 %

Pass

8 Mechanical ventilation

Continuous supply and extract system

Specific fan power

0.62

Maximum

1.5

Pass

MVHR efficiency

94 %

Minimum

70 %

Pass

Criterion 3 – Limiting the effects of heat gains in summer

9 Summertime temperature

Overheating risk (Thames Valley)

Medium

Pass

Based on:

Overshading

Average

Windows facing South

13.86 m², No overhang

Windows facing West

4.09 m², No overhang

Air change rate

6.00 ach

Blinds/curtains

None

Criterion 4 – Building performance consistent with DER and DFEE rate

Party Walls

Type

U-value

Filled Cavity with Edge Sealing

0.00

W/m²K

Pass

Air permeability and pressure testing

3 Air permeability

Air permeability at 50 pascals

3.00 (design value)

m³/(h.m²) @ 50 Pa

Maximum

10.0

m³/(h.m²) @ 50 Pa

Pass

10 Key features

External wall U-value

0.13

W/m²K

External wall U-value

0.13

W/m²K

Party wall U-value

0.00

W/m²K

Roof U-value

0.12

W/m²K

Air permeability

3.0

m³/m²h

Photovoltaic array

882.64

kWh/Year

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

SUMMARY FOR INPUT DATA

Calculation Type: New Build (As Designed)

Property Reference	Q-03466 APT.05	Issued on Date	05/05/2023
Assessment Reference	Design V3	Prop Type Ref	New Build
Property	The Star, Uxbridge Road, Uxbridge, UB10 0LY		

SAP Rating	82 B	DER	15.29	TER	26.55
Environmental	90 B	% DER<TER	42.41		
CO ₂ Emissions (t/year)	0.64	DFEE	28.41	TFEE	39.37
General Requirements Compliance	Pass	% DFEE<TFEE	27.83		

Assessor Details	Mr. Paul Whiffin, Paul Whiffin, Tel: 01763 268685, energy@atspaceltd.com	Assessor ID	y314-0001
Client	Harjeet Suri, 33244		

SUMMARY FOR INPUT DATA FOR: New Build (As Designed)

Orientation	North
Property Tenure	Unknown
Transaction Type	New dwelling
Terrain Type	Suburban
1.0 Property Type	Flat, Semi-Detached
2.0 Number of Storeys	1
3.0 Date Built	2022
4.0 Sheltered Sides	2
5.0 Sunlight/Shade	Average or unknown

6.0 Measurements

	Heat Loss Perimeter	Internal Floor Area	Average Storey Height
Ground Floor:	21.84 m	49.86 m ²	2.52 m

7.0 Living Area	24.44	m ²
-----------------	-------	----------------

8.0 Thermal Mass Parameter	Simple calculation - Medium	
Thermal Mass	250.00	kJ/m²K

9.0 External Walls

Description	Type	U-Value (W/m ² K)	Gross Area (m ²)	Nett Area (m ²)
External Wall	Cavity Wall	0.13	37.90	17.86
Sheltered Wall	Cavity Wall	0.13	17.14	17.14

9.1 Party Walls

Description	Type	Construction	U-Value (W/m ² K)	Area (m ²)
Party Wall 1	Filled Cavity with Edge Sealing		0.00	20.76

10.0 External Roofs

Description	Type	U-Value (W/m ² K)	Gross Area (m ²)	Nett Area (m ²)
Flat Roof	External Flat Roof	0.12	13.10	13.10

12.0 Opening Types

Description	Data Source	Type	Glazing	Glazing Gap	Argon Filled	G-value	Frame Type	Frame Factor	U Value (W/m ² K)
Glazing	BFRC data	Window	Double Low-E Soft 0.1			0.50			1.20
Solid Door	Manufacture	Door to Corridor							1.80

13.0 Openings

SUMMARY FOR INPUT DATA

Calculation Type: New Build (As Designed)

Name	Opening Type	Location	Orientation	Curtain Type	Overhang Ratio	Wide Overhang	Width (m)	Height (m)	Count	Area (m²)	Curtain Closed
RW	Window	[1] External Wall	South	None	0.00					13.86	
RSW	Window	[1] External Wall	West	None	0.00					2.02	
RSGD	Window	[1] External Wall	West	None	0.00					2.07	
FSD	Door to Corridor	[1] External Wall	North							2.09	

14.0 Conservatory	None	
15.0 Draught Proofing	100	%
16.0 Draught Lobby	No	

17.0 Thermal Bridging	Calculate Bridges
------------------------------	--

17.1 List of Bridges

Source Type	Bridge Type	Length	Psi	Imported	Reference:
Independently assessed	E2 Other lintels (including other steel lintels)	8.52	0.040	No	LABC
Independently assessed	E3 Sill	6.65	0.027	No	LABC
Independently assessed	E4 Jamb	23.32	0.029	No	LABC
Independently assessed	E7 Party floor between dwellings (in blocks of flats)	6.31	0.039	No	
Table K1 - Default	E14 Flat roof	15.53	0.080	No	
Independently assessed	E16 Corner (normal)	7.56	0.050	No	LABC
Independently assessed	E17 Corner (inverted – internal area greater than external area)	2.52	-0.091	No	
Table K1 - Approved	E18 Party wall between dwellings	2.52	0.060	No	
Table K1 - Default	E25 Staggered party wall between dwellings	2.52	0.120	No	
Table K1 - Default	P3 Party wall - Intermediate floor between dwellings (in blocks of flats)	5.83	0.000	No	
Table K1 - Default	P4 Party wall - Roof (insulation at ceiling level)	2.41	0.240	No	

Y-value	0.057	W/m²K
---------	------------------------------------	-------

18.0 Pressure Testing	Yes	
Designed AP ₅₀	3.00	m³/(h.m²) @ 50 Pa
Property Tested ?		
As Built AP ₅₀		m³/(h.m²) @ 50 Pa

19.0 Mechanical Ventilation

Summer Overheating

Windows open in hot weather	Windows fully open
Cross ventilation possible	Yes
Night Ventilation	No
Air change rate	6.00

Mechanical Ventilation

Mechanical Ventilation System Present	Yes
Approved Installation	Yes
Mechanical Ventilation data Type	Database
Type	Balanced mechanical ventilation with heat recovery
MV Reference Number	500502
Configuration	1
MVHR Duct Insulated	Yes
Manufacturer SFP	0.62
Duct Type	Rigid
MVHR Efficiency	94.00
Wet Rooms	1

SUMMARY FOR INPUT DATA

Calculation Type: New Build (As Designed)

20.0 Fans, Open Fireplaces, Flues

	MHS	SHS	Other	Total
Number of Chimneys	0		0	0
Number of open flues	0		0	0
Number of intermittent fans				0
Number of passive vents				0
Number of flueless gas fires				0

21.0 Fixed Cooling System

No

22.0 Lighting

Internal

Total number of light fittings	20	
Total number of L.E.L. fittings	20	
Percentage of L.E.L. fittings	100.00	%

External

External lights fitted	Yes
Light and motion sensor	Yes

23.0 Electricity Tariff

Standard

24.0 Main Heating 1

	SAP table	
Percentage of Heat	100	%
Main Heating	BEE	
SAP Code	191	
Efficiency (SAP Table)	100.0	%
Controls	CBI Time and temperature zone control	
PCDF Controls	0	
Delayed Start Stat	Yes	
Sap Code	2110	
Is MHS Pumped	Pump in heated space	
Heat Emitter	Underfloor	
Underfloor Heating	Yes - Pipes in thin screed	

25.0 Main Heating 2

None

Community Heating

None

28.0 Water Heating

	HWP From main heating 1
Water Heating	Main Heating 1
Flue Gas Heat Recovery System	No
Waste Water Heat Recovery Instantaneous System 1	No
Waste Water Heat Recovery Instantaneous System 2	No
Waste Water Heat Recovery Storage System	No
Solar Panel	No
Water use <= 125 litres/person/day	Yes
SAP Code	901
Immersion Heater	Dual

29.0 Hot Water Cylinder

Hot Water Cylinder

SUMMARY FOR INPUT DATA

Calculation Type: New Build (As Designed)

Cylinder In Heated Space	Yes	
Insulation Type	Measured Loss	
Cylinder Volume	200.00	L
Loss	1.90	kWh/day
31.0 Thermal Store	None	
32.0 Photovoltaic Unit	More Dwellings, One Block	
Apportioned	882.64	kWh/Year

Recommendations

Lower cost measures

None

Further measures to achieve even higher standards

None