


Models GB..

Arbitrary installation position and flexible assembly by five possible discharge directions.

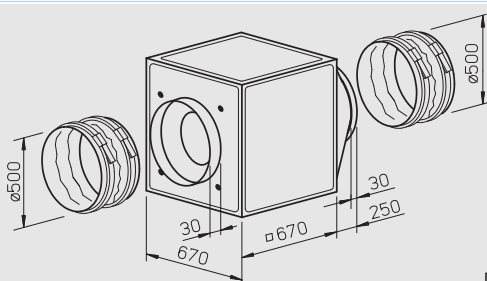

■ Special features of type GB.. T120

- Designed for moving dirty, humid and hot air volumes up to max. 120° C.
- Motor located outside of air flow.
- Temperature insulated partition panel between motor and impeller, lined with 20 mm thick, flame-retardant mineral wool.
- Easily accessible motor and impeller unit, removable without disassembling the system components.
- Inspection cover with handle, simply remove for cleaning and maintenance.
- Condensate collector with condensate spigot included in delivery. Drill hole for rain drainage (accessories) for outdoor installation is prepared.

□ Assembly of types GB.. T120

Installation must be carried out with condensation discharge showing downward. Flexible assembly by three possible centrifugal discharge directions via the discharge adapter. Outdoor installation is possible using outdoor cover hood and external weather louvers (accessories).

■ Feature


□ Assembly of types GB..

Arbitrary installation position and flexible assembly by five possible discharge directions via the discharge adapter. For wall mounting the wall bracket (accessories) has to be used. Outdoor installation is possible using outdoor cover hood and external weather louvers (accessories).

Models GB.. T120

NEW!

Designed for moving dirty, humid and hot air up to max. 120° C.

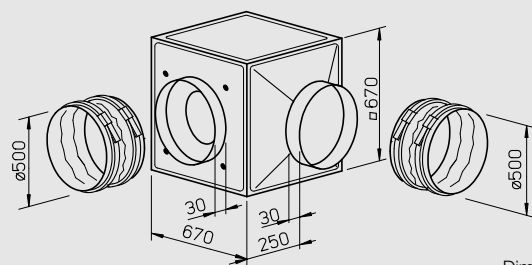

■ Specification of both types

□ Casing

Self-supporting frame construction from aluminium hollow profiles. Double-walled side panels from galvanised sheet steel, lined with 20 mm thick temperature insulating and flame-retardant mineral wool. Intake cone for ideal inflow as well as spigot and flexible sleeve (for the respective max. permissible air flow temperature) for duct connection. With discharge adapter (from square to circular) on the pressure side for low-loss discharge and flexible sleeve to reduce vibration transmission. Simple positioning by standard crane hooks.

□ Impeller

Smooth running backward curved aluminium centrifugal impeller highly efficient and direct driven. Energy efficient with a low noise development. Dynamically balanced together with the motor to DIN ISO 1940 Pt.1 – class 6.3.

□ Motor

Maintenance-free external rotor motor or IEC-standard motor protected to IP 44 or 54. With ball bearings and radio suppressed as standard.

□ Electrical connection


Standard terminal box (IP 54) fitted on the motor; with GB.. T120 fitted on the motor support plate.

Type	Ref. No.	Air flow volume (FID)	R.P.M.	Sound press. level case breakout	Motor power (nominal)	full load	Current speed controlled	Wiring diagram	Maximum air flow temperature full load	Nominal weight (net)	5 step transformer controller with motor protect. unit	Full motor protection unit using the thermal contacts
		m^3/h	min^{-1}	dB(A) at 4 m	kW	A	A	Nr.	$^{\circ}\text{C}$	kg	Type Ref. No.	Type Ref. No.
1 Phase motor, 230 V / 1 ph. / 50 Hz, capacitor motor, protection to IP 54												
GBW 500/6	5519	5760	880	35	0.52	2.30	2.60	864	45	45	MWS 3 1948	TSW 3.0 1496 MW ¹⁾ 1579
GBW 500/4	5517	8400	1350	45	1.38	6.40	8.20	865	65	55	MWS 10 1946	— — —
2 speed motor, 3 Phase motor, 400 V / 3 ph. / 50 Hz, Y/Δ-wiring, protection to IP 54												
GBD 500/4/4	5518	8000/8850	1075/1340	45	0.97/1.45	1.60/2.80	2.90	867	50	50	RDS 7 1578	TSO 5.5 1503 M4 ²⁾ 1571
1 Phase motor, 230 V / 1 ph. / 50 Hz, capacitor motor, protection to IP 54												
GBW 500/4 T120	5776	8345	1340	45	1.40	6.1	7.0	301	120	100	MWS 10 1946	— — MW ¹⁾ 1579
2 speed motor, 3 Phase motor, 400 V / 3 ph. / 50 Hz, Y/Δ-wiring, protection to IP 54												
GBD 500/4/4 T120	5777	7320/8350	1070/1365	45	1.07/1.50	1.80/3.00	3.0	947	120	110	RDS 4 1316	TSO 3.0 1502 M4 ²⁾ 1571


1) incl. operation switch

2) incl. operation and 2 speed switch


GBW 500/6

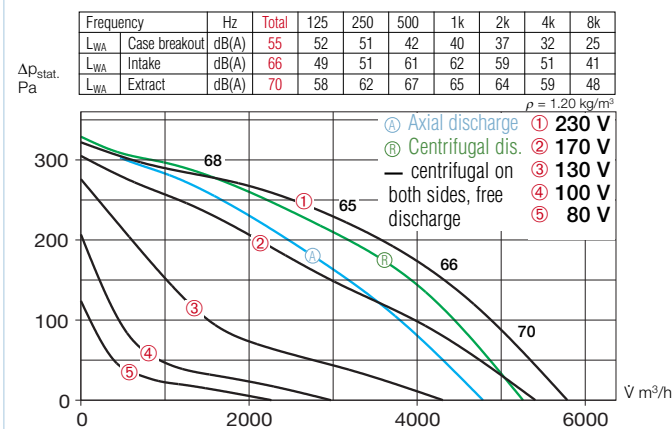


GBD 500/4/4

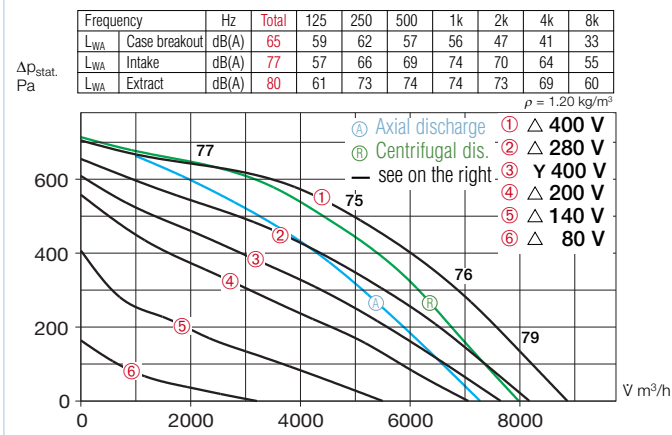


GBD 500/4/4 T120

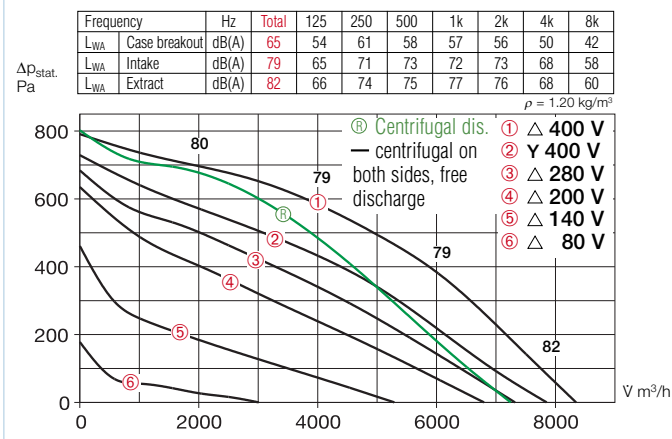

GBW 500/4

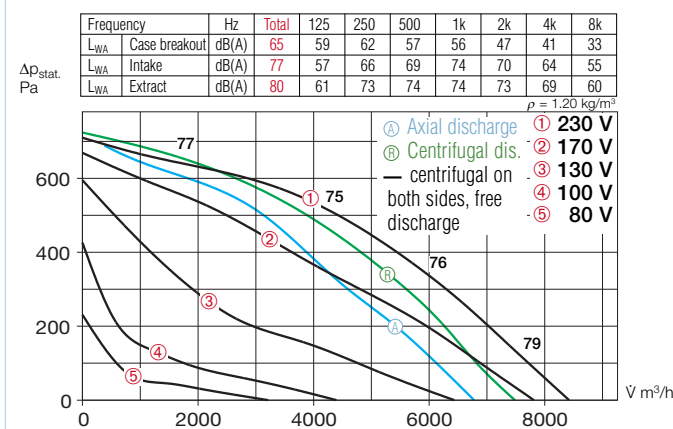

GBW 500/4 T120

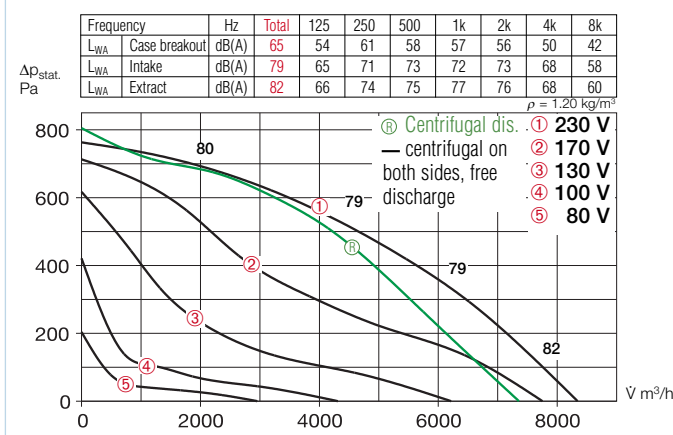

Motor protection

Motors have thermal contacts wired to the terminal block and must be connected to a motor protection unit.

Speed control

All types are speed controllable by voltage reduction using a transformer controller. The 3-phase models can also be 2 speed controlled by star/delta switch (accessories DS 2 or full motor protection unit M 4). The duties at different speeds are given in the performance curve.

Sound levels

Total sound power levels and the spectrum figures in dB(A) are given for:

- sound level case breakout
 - sound level intake
 - sound level extract
- in the tables above the performance curve. Beside, the sound power level (on intake) is stated over the rated characteristic curve. In the table below you can also find the
- case breakout level at 4 m (freefield conditions).

Information Pages

Design of systems, acoustic 12 on
 General techn. information, speed control 17 on

Accessory-Details Pages

Speed controller and full motor protection unit 397 on

Accessories of both types

Anti vibration mounts for installation indoors. Set of 4.

SDD-U Ref. No. 5627

Wall bracket for wall mounting.

GB-WK 500 Ref. No. 5626

External weather louvers to over exhaust opening.

GB-WSG 500 Ref. No. 5639

Outdoor cover hood for outdoor installation.

GB-WSD 500 Ref. No. 5748

On/Off and 2-speed switch for 3-phase star/delta motors.

DS 2 ³⁾ Ref. No. 1351

Specific accessories

for types GB..

Condensate collector with condensate spigot for pipe connection. GB-KW 500 Ref. No. 5644

(Condensate collector with condensate spigot included in delivery with GB.. T120).

for types GB.. T120

Rain drainage for outdoor installation (drill holes for rain drainage is already prepared).

GB-RA Ref. No. 9418

³⁾ full motor protection unit recommended: MD Ref. No. 5849