

GHA Trees
5 South Drive
High Wycombe
Bucks
HP13 6JU



Glen Harding MSc (Forestry), MA ArborA
t: 07884 056025
e: info@ghatrees.co.uk
www.ghatrees.co.uk

Arboricultural and Planning Integration Report: 25 Linksway, Northwood, Middlesex

24th August 2021

Ref: GHA/DS/177960:21a

CONTENTS

Section	Subject	Page
	Instructions	3
	Executive Summary	3
	Documents Supplied	4
	Scope of Survey	4
	Survey Method	5
	The Site	6
	Subject Trees	6
	The Proposal	6
	Arboricultural Impact Assessment	7
	Post Development Pressure	8
	Tree Protection Measures and Preliminary Method Statement for Development Works	9
	Conclusion	14
	Recommendations	14
Appendix A	Site Plan / Arboricultural Impact Plan (Attached as a separate PDF file to maintain its integrity / accuracy)	
Appendix B	Tree Table	
Appendix C	Extract from BS5837:2012 – Protective Fencing	
Appendix D	Cellweb – no dig driveway product information Attached as a separate PDF file to maintain its integrity / accuracy)	

Arboricultural Report

Location: 25 Linksway, Northwood, Middlesex
Ref: GHA/DS/177960:21a
Client: Seabrook Architects
Date: 24th August 2021
Prepared by: Glen Harding MICFor, MSc (Forestry), MA ArborA
Date of Inspection: 24th February 2021

Instructions

Issued by – Seabrook Architects

TERMS OF REFERENCE – GHA Trees were instructed to survey the subject trees within and adjacent to 25 Linksway, Northwood, Middlesex, in order to assess their general condition and to provide a planning integration statement for the indicative proposed development that safeguards the long term well being of the retained trees and plans tree planting in a sustainable manner.

The writer retains the copyright of this report and its content is for the sole use of the client(s) named above. Copying of this document may only be undertaken in connection with the above instruction. Reproduction of the whole, or any part of the document without written consent from GHA Trees is forbidden. Tree work contractors, for the purpose of tendering only, may reproduce the Schedule for tree works included in the appendices.

Executive Summary

The proposal for the site is to demolish the existing house and then construct a new detached dwelling. The proposed scheme requires the removal of a small number of trees and shrubs. The scheme presents an excellent opportunity to plant some new trees, to enhance the site and local area for the future. The retained trees require protection in accordance with industry best practice and BS 5837: 2012 – Trees in relation to design, demolition and construction – recommendations, in order to ensure their longevity.

Documents Supplied

The client supplied the following documents:

1. Topographical survey
2. Existing layout plans
3. Proposed layout plans

Scope of Survey

- 1.1 The survey is concerned with the arboricultural aspects of the site only.
- 1.2 The planning status of the subject property was not investigated in detail.
- 1.3 A qualified Arboriculturist undertook the report and site visit and the contents of this report are based on this. Whilst reference may be made to built structure or soils, these are only opinions and confirmation should be obtained from a qualified expert as required.
- 1.4 Trees in third party ownership were surveyed from within the subject property, therefore a detailed assessment was not possible and some (if not all) measurements were estimated. Where the stem location of a third party tree has been estimated, this is noted on the plan.
- 1.5 Dense vegetation or climbers (such as ivy) also prohibited full inspections for some trees; this is noted where applicable.
- 1.6 No discussions took place between the surveyor and any other party.
- 1.7 The trees were inspected on the basis of the Visual Tree Assessment method expounded by Mattheck and Breleor (The body language of tree, DoE booklet Research for Amenity Trees No. 4, 1994)
- 1.8 The survey was undertaken in accord with British Standard 5837: 2012 – Trees in relation to design, demolition and construction – recommendations.
- 1.9 Tree will be required to be in accord with British Standard 3998 – 2010 (Tree Work - Recommendations).
- 1.10 Underground services near to trees will need to be installed in accord with the guidance given in BS5837 together with the National Joint Utilities Group Booklet 4: 2007 Guidelines for the planning, installation and maintenance of utility services in proximity to trees (NJUG4).
- 1.11 The client's attention is drawn to the responsibilities under the Wildlife and Countryside Act (1981).

Survey Method

- 2.1 The survey was conducted from ground level with the aid of binoculars if needed.
- 2.2 No tissue samples were taken nor was any internal investigation of the subject trees undertaken.
- 2.3 No soil samples were taken.
- 2.4 The height of each subject tree was estimated using a clinometer and recorded to the nearest half metre.
- 2.5 The stem diameter for each tree was measured in line with the requirements set out in BS 5837: 2012 – Trees in relation to design, demolition and construction – recommendations.
- 2.6 The crown spreads were measured with an electronic distometer and recorded to the nearest half metre. Where the crown radius was notably different in any direction this has been noted on the Plan (appendix A) and within the tree table (Appendix B). The crowns of those trees that are proposed for removal, or trees where the crown spread is deemed insignificant in relation to the proposed development are not always shown on the appended plan; however their stem locations are marked for reference.
- 2.7 The Root Protection Area (RPA) for each tree is included in the tree table, both as an area, and as the radius of a circle.
- 2.8 The crown clearance was measured using a clinometer and recorded to the nearest half metre. Where it is significantly lower in one direction, this is noted within the tree table at appendix B.
- 2.9 All of the trees that were inspected during the site visit are detailed on the plan at Appendix A; this plan was produced in colour and **MUST** only be scanned or reproduced in colour. The trees on this plan are categorised and shown in the following format:

COLOUR CODING AND RATING OF TREES:

Category A – Trees of high quality with an estimated remaining life expectancy of at least 40 years. Colour = light green crown outline on plan.

Category B – Trees of moderate quality with an estimated remaining life expectancy of at least 20 years. Colour = mid blue crown outline on plan.

Category C – Trees of low quality with an estimated remaining life expectancy of at least 10 to 20 years, or young trees with a stem diameter below 150mm. Colour = uncoloured crown outline on plan.

Category U – Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years. Colour = red crown outline on plan.

All references to tree rating are made in accordance with BS 5837: 2012 – Trees in relation to design, demolition and construction – recommendations’, Table 1.

The Site

- 3.1 The site is located on Linksway, a residential through road located to the north of Northwood.
- 3.2 A good tree cover is present on the site itself as well as adjacent sites, with many semi-mature and mature trees of both native and exotic origin characterising the local area.
- 3.3 Access to the property is currently gained via a driveway to the front (south west) of the site.

The Subject Trees

- 4.1 The details of the subject trees are set out in the Schedule at Appendix B.
- 4.2 Of the thirty two individual trees, and groups of trees surveyed, seven have been assessed as BS 5837 category B, twenty four have been assessed as BS category C, with the remaining tree being assessed as BS 5837 category U.

Category B	7 trees
Category C	24 trees / groups
Category U	1 tree

The Proposal

- 5.1 The proposal for the site is to demolish the existing house and then construct a new detached dwelling.
- 5.2 The proposed location of the above structures can be seen on the appended plan.

Arboricultural Impact Assessment

PROPOSED TREE REMOVAL / RETENTION:

- 6.1 The following trees are proposed for removal as part of the new development, as these specimens could not be effectively retained as they are located within the outline of the new structures, or located too close to make their retention feasible / sustainable.

T1, T2, T3, T4, T5, T6, T7, T8, T9, G16, G19, T20, T29, T30 and T32.

- 6.2 The assessed grading (as per BS5837 table 1) of each of the trees to be removed, as well as any relevant comments on their condition can be seen in the tree table at appendix B.

TREE PRUNING TO ACCOMMODATE THE PROPOSAL OR ACCESS TO THE SITE

- 6.3 T13 and T17 will be pruned to improve clearances from the proposed new structure. A full specification for the proposed pruning to each tree can be seen in the tree table at appendix B:
- 6.4 The implementation of the proposal does not lead to the requirement to prune any of the other retained trees, or shrubs.

ASSESSMENT OF RETAINED TREES ROOT PROTECTION AREAS

- 6.5 Section 4.6.3 of BS 5837: 2012 states that the Root Protection Area (RPA) of each tree should be assessed by an arboriculturalist considering the likely morphology and disposition of the roots, when known to be influenced by past or existing site conditions.
- 6.6 The RPAs of T13, T14, T17 have been amended to take account of the existing buildings; these adjustments can be seen on the appended plan.
- 6.7 The other RPAs have been drawn as notional circles, as there are no structures within their RPAs that have been assessed to significantly impact the root layout.
- 6.8 A portion of the proposed new structure would be situated within a section of the assessed Root Protection Area of T17 as can be seen on the appended plan. The construction design process has shown consideration of this issue (of working within the RPA) by specifying the use of specialised footings; these footings will ensure minimal root disturbance occurs near this tree. This tree has been graded as a C category tree in accordance with BS 5837: 2012 – Table 1, and should therefore not act as a limitation on the effective use of the site, or impose any constraints on the layout.
- 6.9 **In order to arrive at a suitable foundation design (which minimises root disturbance within the RPAs of nearby retained trees), site specific and specialist advice regarding footings should be sought from an Engineer, in close discussion with the projects Arboriculturalist.**

- 6.10 The proposed new structures are situated outside of the assessed RPA's of all of the other trees proposed for retention, therefore these trees pose no below ground constraints on the new structures or vice versa.

PROPOSED ACCESS TO THE NEW DEVELOPMENT

- 6.11 Where sections of the new driveway are within the RPA retained trees, an "up and over" style construction will be necessary, to ensure that all existing ground levels are retained in their current form, as well as ensuring that satisfactory moisture and oxygen can be obtained from the underlying soil by any tree roots in this area. A design for this proposed access route must be drawn up by a structural engineer, in close co-ordination with the retained arboriculturalist. A preliminary method statement has been included at section 8 of this document.

INSTALLATION OF SERVICES

- 6.12 The installation of underground apparatus and drainage systems with the use of mechanical excavators will undoubtedly sever any roots that may be present and can change the hydrology and structure of the nearby soil in a way that will adversely affect the health of any nearby trees. Particular care should therefore be taken when assessing the layout of new services and consideration **MUST** be given to the methods of installation of **ALL** underground apparatus.
- 6.13 New services should be routed to avoid all RPAs of retained trees on site and within nearby sites. From an assessment of the subject site, undertaken in conjunction with the project architect, there is no reason to assume this isn't possible. Inspection chambers must also be sited outside the RPAs of any nearby trees.

Post Development Pressure

FUTURE TREE AND STRUCTURE RELATIONSHIPS

- 7.1 The retained trees are at a satisfactory distance from the proposed new building, and highly unlikely to give rise to any inconvenience.
- 7.2 Regular inspections of the retained trees by a suitably qualified Arboriculturalist and subsequent remedial works will ensure that the trees are maintained in a suitable manner, to exist in harmony with the new structures and its occupants for many years to come.

REMEDIATION / REPLACEMENT PLANTING AND SOFT / HARD LANDSCAPING

- 7.3 An assessment of suitable planting sites within the proposed development area confirms that the loss of trees discussed in section 6.1 can be addressed by the planting of new trees that would complement the existing landscape.
- 7.4 Some proposed locations for new trees can be seen on the architect's plans. Any new trees on the site frontage should be of a minimum 18/20 cm girth and purchased from a reputable nursery. Tree planting should be undertaken between

the months of November and March by a suitably experienced contractor. The scheme should include the implementation of an aftercare package to include: weed management, tree hydration, stake and tie maintenance, replacement of any failures, mulching and formative pruning.

- 7.5 Any new trees that are planted should be selected to ensure they do not become a nuisance and that the level of routine maintenance is low.

Tree Protection Measures and Preliminary Method Statement for Development Works

8.1 TREE PRUNING / REMOVAL

A list of all tree works that are required (including trees to be removed) is included in the tree table at Appendix B. Pruning / removal has only been specified for the following reasons:

- Where work is necessary to implement the proposed scheme.
- Where works are required for safety reasons.
- Where work is required to improve tree form, or improve the appearance of overgrown areas of the site.

Where any tree work is needed, this work will be in accordance with British Standard 3998 – 2010 (Tree Work - Recommendations).

8.2 TREE PROTECTION BARRIERS

It is essential for the future health of the trees to be retained on site, that all development activity is undertaken outside the root protection zone of these trees. The position of the fence **MUST** be marked out with biodegradable marker paint on site and agreed with appropriate representatives from the LPA and contractor. The fencing **MUST** be erected **prior** to any works in the vicinity of the trees and removed only when all development activity is complete. The protective fencing **MUST** be as that shown in BS 5837 (see Appendix C). The herras panels **MUST** be joined together using a minimum of two anti-tamper couplers which **MUST** be installed so they can only be removed from the inside of the fence. The panels **MUST** supported by stabilizer struts, which **MUST** be installed on the inside and secured to the ground using pins or appropriate weights.

The Fence must be marked with a clear sign reading:

“Construction Exclusion Zone – No Access”

8.3 GROUND PROTECTION – LIGHTWEIGHT ACCESS ONLY

Where any additional ground protection is required, these areas **MUST** be covered with a permeable membrane, with 150mm layer of compressible woodchip overlaying it; an 18mm marine ply boards will then be secured on top of the woodchip to allow a 1.5tonne mini-digger to access the area without causing major compaction or soil erosion.

8.4 REMOVAL / DEMOLITION OF THE EXISTING STRUCTURES

Some existing structures located within the RPAs of retained trees will need to be removed. If these structures do not require removal to facilitate the development, they **MUST** be left in situ for the main phase of building works to offer additional protection and then removed as part of the landscaping phase, once all larger machinery has left site.

METHODOLOGY:

- The above ground parts of the structure must be removed by hand, using hand tools only.
- The removed material must be stored outside of the RPA of all of the retained trees whilst work commences.
- The sub-bases can be removed using a 360 excavator. The machine must work from outside the RPA. The machine must start work at the points nearest to any retained trees, working backward away from each tree so that the remaining hard surfacing can be used to support the load of the machine and protect the ground. **(NOTE: the size of any such machine should be checked before starting works, to ensure a) the existing surface will support the machines load and b) that there is sufficient crown clearances to avoid any potential for crown damage).** This work **must** be undertaken utilising a banksman.
- If during the work, any roots from the retained trees are discovered in excess of 25mm, the retained arboriculturalist must be contacted immediately to assess the roots and arrange subsequent working methods that will cause no damage to the tree(s).
- Care must be taken to avoid damage to the soil beneath these structures. If any roots are exposed, these should be covered immediately and the retained arboriculturalist must be contacted immediately to assess the roots and arrange subsequent working methods that will cause no damage to the tree(s).

8.5 IMPLEMENTATION OF THE NEW BUILDING SECTION NEAR TO T17 ON A "RAFT STYLE" FOUNDATION WITH ASSOCIATED PILES / PADS

- **NOTE: any excavations in the RPAS with the use of mechanical excavators will undoubtedly sever any roots that may be present and can change the hydrology and structure of the nearby soil in a way that will adversely affect the health of any nearby trees.**
- The locations of the supporting piles / pads is easily changeable, and the exact locations for them will be confirmed following hand excavated, trial digs of the top 1000mm of each potential hole (this is where the majority of roots exist).
- Hand tool excavations will only be undertaken by fully briefed site personnel. This operation will be done slowly and carefully to ensure the retention and protection of any roots that are discovered that are in excess of 25mm. These roots **MUST** then be covered and protected using damp hessian whilst further excavation commences; hessian must be left in situ until backfilling commences and re-wetted if needed to avoid root desiccation. **NOTE:**

OPERATIVES MUST CHECK FOR THE PRESENCE OF ANY EXISTING UNDERGROUND SERVICES PRIOR TO THE COMMENCEMENT OF SUCH WORK.


- Any roots discovered in these trial pits in excess of 25mm diameter will immediately signal the requirement for a change of pit location.
- These trial digs will be attended by the retained arboriculturalist and site manager who will agree the final locations of the piles / pads.
- Ground protection as that detailed above should be placed over the working area whilst the deeper piling / excavation of the final locations commences, with the use of a lightweight rig and / or hand tools. This will alleviate the possibility of excessive compaction or erosion within the RPA's.
- Once the trial holes are excavated to the correct depth, care must then be taken to ensure the new piles / pads are installed so as to avoid any roots present. **Any roots that require pruning (those less than 25mm diameter) should be cut using sharp tools to leave a 'clean' cut, in order to minimise the risk of infection by decay pathogens.**
- Once the piles / pads are installed, the excavated holes must then be backfilled and the soil compacted using hand tools only, to ensure not air pockets are left as these can be damaging to tree roots.

8.6 NO DIG SURFACING CONSTRUCTION METHOD IN ACCORDANCE ARBORICULTURAL PRACTICE NOTE 12 AND BS: 5837

The sections of the new driveway that are within the RPA's of the retained trees **MUST** be constructed as follows (see blue hatching on appended plan for locations). This construction **MUST** be implemented prior to the commencement of any development, for use by construction traffic. The final "top-dressing" of the drive will be completed when all construction vehicles have permanently left the site.

Below is a diagram detailing the makeup of the new drive and also a typical cross the installation methodology is included below this diagram.

No dig drive makeup

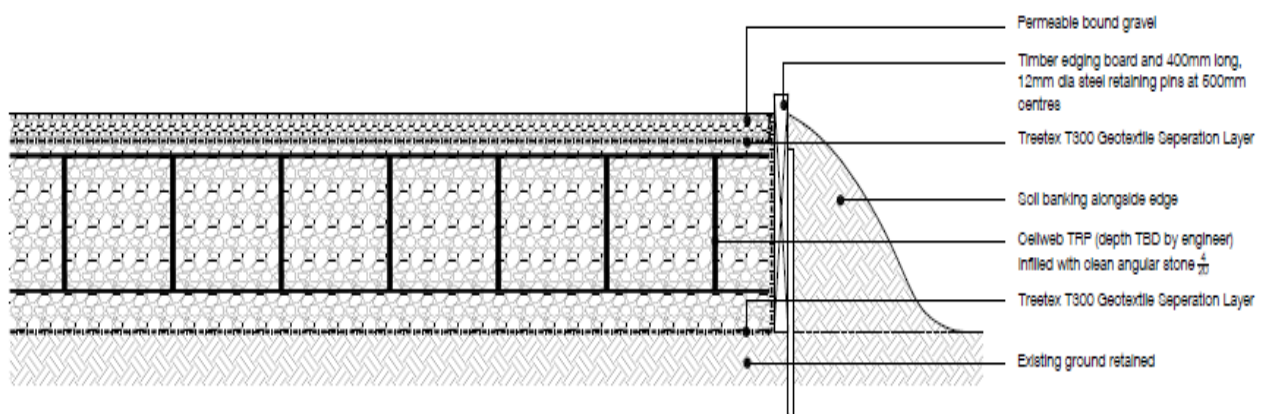


Typical section:



METHODOLOGY:

- Eradication of all existing ground vegetation **MUST** be undertaken using a translocated herbicide. Any product used for this purpose **MUST** be selected to ensure that it will not have an adverse affect on the health of the retained trees, and carried out by a suitably trained operative.
- Any major protrusions within the soil **MUST** be removed, such as large rocks or existing tree stumps. Any holes **MUST** be filled with sharp sand.
- Lay a geotextile membrane over the entire area(s) to be protected, ensuring a one 1m overlap where necessary.
- Construction of the edging of the area is to be implemented with the use of vertical steel pegs driven into the ground at intervals of 500mm with side supports firmly attached. **CHECK FOR UNDERGROUND SERVICES PRIOR TO THE COMMENCEMENT OF SUCH WORK.**
- The three dimensional cellular confinement system (e.g cellweb or similar) must be cut to size and placed within the pre-prepared area. This area **MUST** now be filled with a no-fines aggregate infill. This **MUST** then be compacted to avoid the possibility of future "rutting".
- Where the new no dig driveway meets the public highway a small amount of level reduction will be needed to ensure the new drive meets the public highway as per the diagram below.

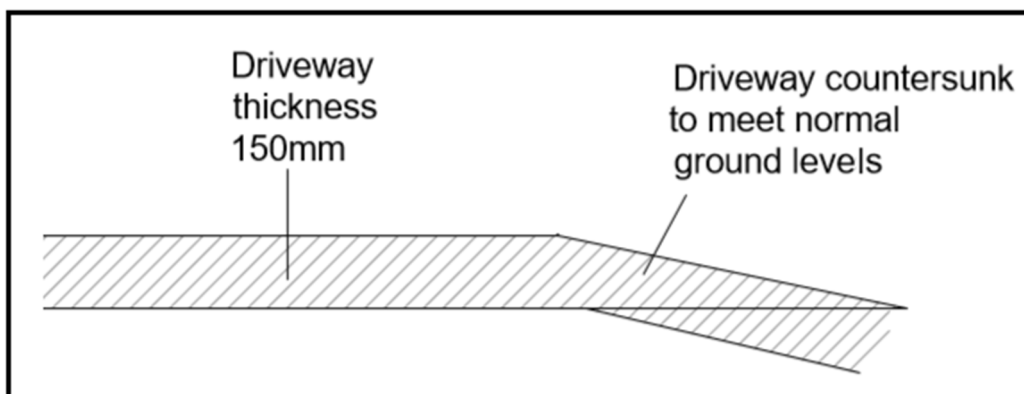

- Lay a final layer of the geotextile membrane on top of this surface.
- A porous material can now be placed on top to complete the construction.
- Graded top soil will be used to bring the adjacent grassed areas to the same level as the new driveway.

N.B. An engineer will prepare the exact specification in agreement with the retained Arboriculturalist.


More information on a suitable product for such driveways can be seen at appendix D.

8.7 BOUNDARY TREATMENTS

Boundary fencing installation / upgrades **MUST** be undertaken as part of the soft landscaping phase and **MUST** be installed ONLY when all machinery that is on site for the main build has permanently left the site (NB. If needed, boundary fencing can also be installed prior to the commencement of site works, i.e.. before any machinery has been bought onto the site). Where sections of new / upgraded fencing are located within the RPA of ANY tree that is to be retained, this work **MUST** be undertaken by hand using hand tools only. The locations of the new fence upright posts will be finalised following trial digs to confirm there are no major (over 25mm) roots present; if any such roots are found, the location must be altered. If any smaller roots are found, these can be cut using sharp hand sharp tools to leave a 'clean' cut, in order to minimise the risk of infection by decay pathogens. The post holes within the RPAs should then be lined with plastic sheeting before any concrete or cement is placed into the hole, in order that there is no risk of leaching into the nearby soil as the mixture dries.

8.8 LOW LEVEL WALLS

The excavation of the foundations for these structures **MUST** be done carefully by hand, with the use of hand tools **ONLY**. Any roots which are discovered during these works which are over 25mm must be retained and worked around with the use of lintels. The retained roots (those over 25mm) must be protected with the use of Hessian sheeting, in order to avoid direct damage and minimise any water loss. These roots must at no point be left uncovered overnight or for lengthy periods (over 2 hours). Minor, smaller roots which are found during the excavations must be cut in accordance with the guidelines set out below. Below is shown a diagram of how the identified roots will be protected and built around.

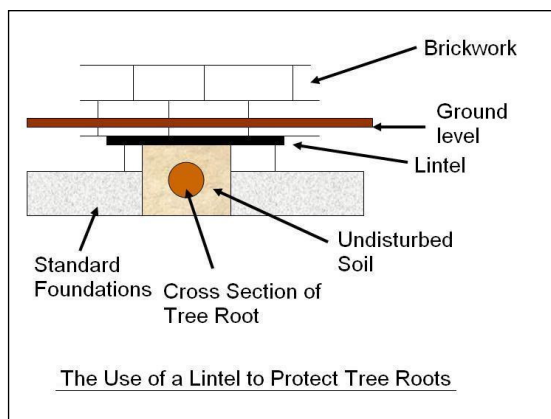

- 8.9 SITE HUTS, WELFARE FACILITIES AND STORAGE OF EQUIPMENT, MATERIALS AND CHEMICALS
All site huts **MUST** be positioned outside of the retained trees RPA's.
- 8.10 USE CRANES, RIGS AND BOOMS
Precautionary measures **MUST** be observed to avoid contact of any retained trees when manoeuvring cranes rigs or booms into position.
- 8.11 INCOMING SERVICES, DRAINAGE AND SOAKAWAYS
New services **MUST** be routed to avoid all RPAs of retained trees on site and within nearby sites. From an assessment of the subject site, undertaken in conjunction with the project architect, there is no reason to assume this isn't possible. Inspection chambers **MUST** be sited outside the RPA.
- 8.12 ON SITE SUPERVISION
Regular site supervision is essential to ensure all potentially damaging activities near to trees are correctly supervised. A pre start meeting will occur to ensure all parties are aware of their responsibilities relating to tree protection on site; this will include a site induction for key personnel.
- 8.13 OTHER TREE PROTECTION PRECAUTIONS
- **NO** fires lit on site within 20 metres of any tree to be retained.
 - **NO** fuels, oils or substances which will be damaging to the tree shall be spilled or poured on site.
 - **NO** storage of any materials within the root protection zone.
- 8.14 DISMANTLING PROTECTIVE BARRIERS
Protective barriers must only be completely removed when all machinery, and equipment has left site.

Conclusion

- 9.1 Subject to precautionary measures as detailed above, the proposal will not be injurious to trees to be retained.
- 9.2 New trees and shrubs can be planted to compensate for the trees to be removed, in order to ensure a sustainable tree stock for the future.

Recommendations

- 10.1 Site supervision – An individual e.g. the Site Agent, must be nominated to be responsible for all arboricultural matters on site. This person must:
- a. Be present on the site the majority of the time.
 - b. Be aware of the arboricultural responsibilities.
 - c. Have the authority to stop any work that is, or has the potential to cause harm to any tree.

- d. Be responsible for ensuring that all site personnel are aware of their responsibilities towards trees on site and the consequences of the failure to observe those responsibilities.
- e. Make immediate contact with the local authority and / or retained arboriculturalist in the event of any related tree problems occurring whether actual or potential.

10.2 It is recommended, that to ensure a commitment from all parties to the healthy retention of the trees, that details are passed by the architect or agent to any contractors working on site, so that the practical aspects of the above precautions are included in their method statements, and financial provision made for these.

24th August 2021

Signed:



Glen Harding MICFor, MSc (Forestry), MArborA
For and on behalf of GHA Trees

Appendix A

Appendix B

Tree Number	Tree Name (species)	Ht (m)	Calculated Stem Diameter (mm)	Number of Stems	Root Protection Area (Radius, m)	N (m)	E (m)	S (m)	W (m)	Age Class	Clearance (m)	Estimated life expectancy	BS Category	Comments / Recommendations
T1	Acer	3	58	3	0.70	0	1	2.5	2.5	MA	2	10-20	C1	Small tree of limited value. Recommend: to be removed.
T2	Birch	5	120	1	1.44	3	2	3	3	MA	2.5	10-20	C1	Small tree of limited value. Recommend: to be removed.
T3	Liquidamber	5	110	1	1.32	2	2	2	2	MA	2	10-20	C1	Small tree of limited value. Recommend: to be removed.
T4	Cherry	5	110	1	1.32	2.5	1	2.5	2.5	MA	2	10-20	C1	Small tree of limited value. Recommend: to be removed.
T5	Acer	2.5	60	1	0.72	1	1	1	1	MA	1	10-20	C1	Small tree of limited value. Recommend: to be removed.
T6	Catalpa	5	94	3	1.13	2.5	1	2.5	2.5	MA	2	10-20	C1	Small tree of limited value. Recommend: to be removed.
T7	Robinia	7	140	1	1.68	2	3	3	3	M	2	Less than 10	U	Major decay in main stem from 0 to 3m. Recommend: to be removed.
T8	Acer	3	52	3	0.62	1	1	1	1	MA	2	10-20	C1	Small tree of limited value. Recommend: to be removed.
T9	Cherry	7	210	1	2.52	4	4	3	2	MA	2	10-20	C1	Small tree of limited value. Recommend: to be removed.
T10	Oak	19	740	1	8.88	7	5.5	8	7	M	8, 8 east	20-40	B1	No notable defects recorded during inspection.

Tree Number	Tree Name (species)	Ht (m)	Calculated Stem Diameter (mm)	Number of Stems	Root Protection Area (Radius, m)	N (m)	E (m)	S (m)	W (m)	Age Class	Clearance (m)	Estimated life expectancy	BS Category	Comments / Recommendations
T11	Red Oak	15	600	1	7.20	7	7	7	7	M	6 south	20-40	B1	Off site - full inspection not possible.
T12	Lawson cypress	15	400	1	4.80	2.5	2.5	2.5	2.5	M	3	10-20	C1	No notable defects recorded during inspection.
T13	Cherry	11	312	2	3.75	2	2.5	3	3	M	6 south	10-20	C1	Off site - full inspection not possible.
T14	Birch	16	260	1	3.12	2.5	2.5	2.5	2.5	M	6 south	10-20	C1	Off site - full inspection not possible.
T15	Holly	8	150	1	1.80	1.5	1.5	1.5	1.5	M	2.5	10-20	C1	Off site - full inspection not possible.
G16	Leyland cypress	12	290	1	3.48	2.5	2.5	2.5	2.5	M	0	10-20	C2	Lapsed hedge. Recommend: to be removed.
T17	Lawson cypress	23	600	1	7.20	3	3	3	3	M	3	10-20	C1	Off site - full inspection not possible.
G18	Holly	11	200	1	2.40	2	2	2	2	MA	3	10-20	C2	Off site - full inspection not possible.
G19	Fir and cherry	6 to 10	150	1	1.80	2	2	2	2	MA	1	10-20	C2	Small trees of limited value. Recommend: to be removed.
T20	Cypress	9	173	3	2.08	2	2	2	2	M	0	10-20	C1	Small tree of limited value. Recommend: to be removed.
T21	Thuja	22	900	1	10.80	4	4	4	4	M	3	10-20	C1	Off site - full inspection not possible.

Tree Number	Tree Name (species)	Ht (m)	Calculated Stem Diameter (mm)	Number of Stems	Root Protection Area (Radius, m)	N (m)	E (m)	S (m)	W (m)	Age Class	Clearance (m)	Estimated life expectancy	BS Category	Comments / Recommendations
T22	Oak	19	590	1	7.08	7	7	7	7	M	7	20-40	B1	No notable defects recorded during inspection.
T23	Oak	19	620	1	7.44	7	7	7	4	M	7	20-40	B1	Slightly sparse crown.
G24	Mixed cypress	10 to 18	400	1	4.80	4.5	4.5	4.5	4.5	M	2	10-20	C2	Lapsed hedge.
T25	Oak	19	820	1	9.84	7	7	7	7	M	5	20-40	B1	No notable defects recorded during inspection.
T26	Leyland cypress	16	350	1	4.20	3.5	3.5	3.5	3.5	M	3	10-20	C1	No notable defects recorded during inspection.
T27	Oak	21	600	1	7.20	7	7	7	7	M	10	20-40	B1	Off site - full inspection not possible.
T28	Norway maple	17	300	1	3.60	5	5	5	5	MA	4	10-20	C1	Off site - full inspection not possible.
T29	Swamp cypress	6	80	1	0.96	1	1	1	1	MA	3	10-20	C1	Small tree of limited value. Recommend: to be removed.
T30	Holly	6	117	2	1.40	2	2	2	2	MA	2	10-20	C1	Small tree of limited value. Recommend: to be removed.
T31	Oak	21	650	1	7.80	3	5	7	7	M	10	20-40	B1	Off site - full inspection not possible.
T32	Thuja	20	960	2	11.53	4	4	4	4	M	1	10-20	C1	Too close to nearby houses. Recommend: to be removed.

KEY :

Tree No: (T= individual tree, G= group of trees, W= woodland)

Age class: Young (Y), Middle aged (MA), Mature (M), Over mature (OM),
Veteran (V)

Height (Ht): Measured in metres +/- 1m

Appendix C

Figure 3 Examples of above-ground stabilizing systems

