

Tree Protection
Exclusion of construction activity from the unprotected recommended root protection areas from the outset will ensure those trees identified for retention are maintained in a safe and healthy condition preventing the following. They should be retained in place for the duration of the development:


- Root severance.
- Damage to the bark, branches and trunks.
- Compaction of the soil within the Construction Exclusion Zone.
- Alterations in soil level.
- Soil contamination by phytotoxic materials such as herbicides, petrol, oils, diesel, cement and concrete washings or other construction additives.

Barrier Fence
Tree protection barriers will be erected prior to the construction process and shall remain in place until completion of the development.

The position of the tree protection fencing is shown on the adjacent drawing. This should be constructed with weld mesh panels, at least 2m high, securely fixed with wire or scaffold clamps, to ground supports well braced to resist impacts, as per illustration below.

Any adjustments or removals of the tree protection measures will only be carried out following consultation and agreement with the project arboriculturalist and/or the Local Authority tree officer.

- The following shall apply to the areas within the tree protection area:
- No mechanical excavation and excavation by other means only with Arboricultural supervision.
 - Hand digging shall only be carried out following a written method statement approved by the project arboriculturalist.
 - No adjustment to ground levels.
 - No storage of plant or material.
 - No storage or handling of any chemicals including cement washing.
 - No vehicular access.
 - No fires.

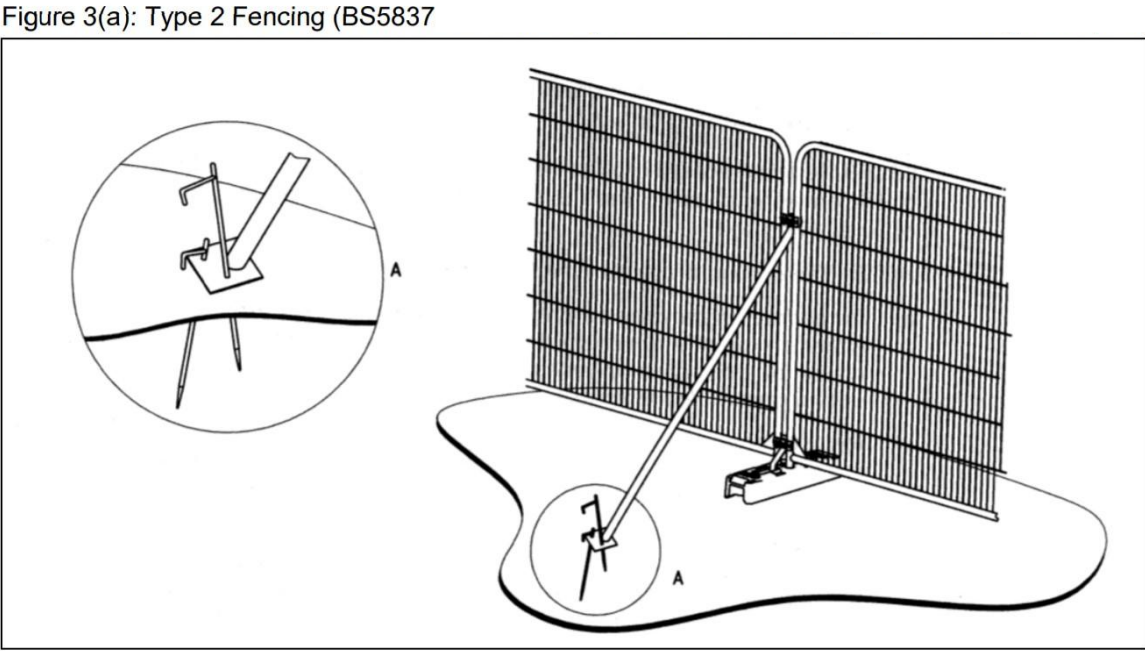

This is not a survey drawing. The accuracy of this drawing may be reliant upon topographical information provided by a third party. Do not scale this drawing unless for planning purposes only. Used figured dimensions. Any discrepancies to be reported. Drawing to be read in conjunction with other relevant architectural drawings / consultants details, reports and specifications.

Rev Date Notes
This drawing is the copyright work of **Key Land Estates Architecture Ltd.** Unless formally assigned in writing


Key Land Estates
• A R C H I T E C T U R E •
52 Brook Street
Tring - Hertfordshire - HP23 5EF
T: +44(0)7968 031139
pburman@keylandestates.co.uk
www.keylandestates.co.uk

Project
**2 & 4 Manor Way
Ruislip HA4 8HD**

for
R.M.C.S

Drawing Title
Tree Protection

Job No KA2508	Dwg No KA2508 -09	Rev
Drawn PKB	Scale 1:100 @ A1 1:200 @ A3	
Date 06/01/2026	Status PLANNING	