

Air Quality Assessment

Long Drive, South Ruislip

Report Ref: AQ2585

December 2025

DOCUMENT CONTROL & DISCLAIMER

Title:

Long Drive, South Ruislip:
Air Quality Assessment

Report Ref:

AQ2585

Date Issued:

December 2025

Client Details:

Hotel Top Ltd
T/A Savera Hotel
Long Drive
Station Approach
South Ruislip
HA4 0HG

Produced By:

GEM Air Quality Ltd
Union House
111 New Union Street
Coventry CV1 2NT

Tel: 0800 689 4329

Email: info@gemairquality.co.uk
www.gemairquality.co.uk

Disclaimer:

GEM Air Quality Ltd completed this Report on the basis of a defined programme of work and terms and conditions agreed with the Client. All reasonable skill and care has been used in producing this report, taking into account the project objectives, the agreed scope of work, prevailing site conditions and the degree of manpower and resources allocated to the project.

GEM Air Quality Ltd accepts no responsibility to any parties whatsoever, following the issue of the Report, for any matters arising outside the agreed scope of the work.

This Report is issued in confidence to the Client and **GEM Air Quality Ltd** has no responsibility to any third parties to whom this Report may be circulated, in part or in full, and any such parties rely on the contents of the report solely at their own risk.

CONTENTS

1	INTRODUCTION	1
1.1	Scope	1
2	POLLUTANTS & LEGISLATION.....	2
2.1	Pollutant Overview	2
2.2	Air Quality Strategy	2
2.3	Clean Air Strategy	3
2.4	London Local Air Quality Management (LLAQM)	3
2.4.1	London Borough of Hillingdon	4
3	PLANNING POLICY & GUIDANCE.....	5
3.1	National Planning Policy & Guidance	5
3.1.1	National Planning Policy Framework	5
3.1.2	Planning Practice Guidance (PPG).....	5
3.1.3	Land-Use Planning & Development Control	6
3.2	Local Planning Policy.....	6
3.2.1	London Environment Strategy	6
3.2.2	The London Plan.....	7
3.2.3	Supplementary Planning Guidance (SPG)	8
3.3	Local Planning Policy.....	9
3.3.1	Hillingdon Local Plan	9
4	ASSESSMENT METHODOLOGY.....	11
4.1	Construction Phase.....	11
4.2	Operational Phase (Traffic Emissions)	13
4.2.1	Modelled Scenarios.....	13
4.2.2	ADMS-Roads.....	13
4.2.3	Emission Factors.....	13
4.2.4	Traffic Data	14
4.2.5	Street Canyons	15
4.3	Background Concentrations	16
4.4	Surface Roughness.....	16

4.5	Meteorological Data	16
4.6	Model Output	17
4.6.1	NOx/NO ₂ Relationship.....	17
4.6.2	Predicted Short Term Concentrations	17
4.6.3	Model Verification.....	18
4.6.4	Receptor Locations.....	18
4.7	Significance Criteria	21
4.7.1	Construction Phase	21
4.7.2	Operational Phase.....	23
5	AIR QUALITY ASSESSMENT	25
5.1	Impact from Construction Activities.....	25
5.2	Impact of Vehicle Emissions	27
5.2.1	Model Verification.....	27
5.2.2	Model Adjustment	27
5.2.3	Nitrogen Dioxide	29
5.2.4	Particulate Matter	30
6	AIR QUALITY NEUTRAL ASSESSMENT	32
6.1	Introduction	32
6.2	Transport Emissions	32
6.3	Building Emissions	32
7	CONCLUSIONS AND RECOMMENDATIONS	33
7.1	Impact from Construction Activities.....	33
7.2	Impact of Vehicle Emissions	33
7.3	Air Quality Neutral Assessment.....	33
7.4	Overall Conclusion	33

LIST OF TABLES

Table 1 – Overview of NO ₂ and PM ₁₀	2
Table 2 – UK Air Quality Objectives for Nitrogen Dioxide and Particulate Matter	3
Table 3 – Annual Average Daily Traffic Flows, Percentage HDV and Speeds for Modelled Roads.....	15
Table 4 – Background NOx, NO ₂ , PM ₁₀ and PM _{2.5} Concentrations	16
Table 5 – Modelled Verification Locations	18
Table 6 – Modelled Receptor Locations	19
Table 7 – Dust Emission Magnitude.....	21
Table 8 – Sensitivity of the Area to Dust Soiling Effects on People and Property	22
Table 9 – Sensitivity of the Area to Human Health Impacts	22
Table 10 – Risk of Dust Impacts	22
Table 11 – Impact Descriptors for Individual Receptors.....	23
Table 12 – Sensitivity of the Surrounding Area	25
Table 13 – Summary of Dust Risk.....	25
Table 14 – Comparison of Modelled and Monitored NO ₂ and PM ₁₀ Concentrations (µg/m ³), 2024 ...	27
Table 15 – Monitored NOx and NO ₂ concentrations, 2024	28
Table 16 – Adjustment of Modelled NOx Contributions, 2024	28
Table 17 – Change in Predicted Annual Mean NO ₂ Concentrations (µg/m ³), Existing Receptors, 2029	29
Table 18 – Change in Predicted Annual Mean PM ₁₀ Concentrations (µg/m ³), Existing Receptors, 2029	30
Table 19 – Change in Predicted Annual Mean PM _{2.5} Concentrations (µg/m ³), Existing Receptors, 2029	31
Table 20 – Transport Emission Benchmark (TEB)	32
Table 21 – Mitigation of Construction Activities	34

LIST OF FIGURES

Figure 1 – Dust Assessment Procedure	12
Figure 2 – Wind Speed and Direction Data, London Heathrow Airport (2024)	17
Figure 3 – Modelled Receptor Locations	20
Figure 4 – Assessing the Significance of Air Quality Impacts of a Development Proposal	24
Figure 5 –Distance from the Proposed Development	26

1 INTRODUCTION

1.1 Scope

GEM Air Quality Ltd has been commissioned to undertake a detailed air quality assessment based on the potential air quality impacts of a proposed mixed-use development located along Long Drive, South Ruislip in Hillingdon, London. The development proposals are as follows:

Partial demolition of existing buildings and erection of three buildings comprising 114no. residential apartments, plus extension to existing hotel, along with access, car parking, servicing, landscaping, and other associated works

The pollutants modelled as part of this assessment are nitrogen oxides (NOx) and particulate matter (PM₁₀ and PM_{2.5}).

The impacts of vehicle emissions have been assessed using the techniques detailed within Volume 11, Section 3 of the Design Manual for Roads and Bridges (DMRB)¹ and the London Local Air Quality Management Technical Guidance (LLAQM.TG19)². The impact of road traffic emissions will be assessed using the ADMS-Roads air dispersion model. This model has been devised by Cambridge Environmental Research Consultants (CERC) and is described as a “comprehensive tool for investigating air pollution problems due to small networks of roads”.

It should be noted that the short-term impacts of NO₂ and PM₁₀ emissions have not been modelled as dispersion models are inevitably poor at predicting short-term peaks in pollutant concentrations, which are highly variable from year to year, and from site to site. Notwithstanding this, general assumptions have been made about short term concentrations based on the modelled annual mean concentrations.

In addition to this, the assessment has also assessed the potential impact on local air quality from demolition and construction activities at the site.

An air quality neutral assessment has also been undertaken in accordance with the London Plan.

¹ Design Manual for Roads and Bridges, Vol 11, Section 3, Part 1 – HA207/07, Highways Agency, May 2007

² London Local Air Quality Management Technical Guidance (TG19), Mayor of London, October 2019

2 POLLUTANTS & LEGISLATION

2.1 Pollutant Overview

In most urban areas of the UK, traffic generated pollutants have become the most common pollutants. These are nitrogen dioxide (NO_2), fine particulates (PM_{10}), carbon monoxide (CO), 1,3-butadiene and benzene, as well as carbon dioxide (CO_2). This air quality assessment focuses on NO_2 and PM_{10} , as these pollutants are least likely to meet their Air Quality Strategy objectives near roads. Table 1 provides an overview of NO_2 and PM_{10} .

Table 1 – Overview of NO_2 and PM_{10}

Pollutant	Properties	Anthropogenic Sources	Natural Sources	Potential Effects
Particles (PM_{10})	Tiny particulates of solid or liquid nature suspended in the air	Road transport; Power generation plants; Production processes e.g. windblown dust	Soil erosion; Volcanoes; Forest fires; Sea salt crystals	Asthma; Lung cancer; Cardiovascular problems
Nitrogen Dioxide (NO_2)	Reddish-brown coloured gas with a distinct odour	Road transport; Power generation plants; Fossil fuels – extraction & distribution; Petroleum refining	No natural sources, although nitric oxide (NO) can form in soils	Pulmonary edema; Various environmental impacts e.g. acid rain

2.2 Air Quality Strategy

The UK Government and the devolved administrations published the latest Air Quality Strategy for England, Scotland, Wales and Northern Ireland on 17 July 2007³. The Strategy provides an over-arching strategic framework for air quality management in the UK.

With regards to this assessment, the Air Quality Strategy contains national air quality standards and objectives established by the Government to protect human health. The objectives for nitrogen dioxide and particulates (PM_{10} and $\text{PM}_{2.5}$) have been set, along with seven other pollutants (benzene, 1,3-butadiene, carbon monoxide, lead, PAHs, sulphur dioxide and ozone). Those which are limit values required by EU Daughter Directives on Air Quality have been transposed into UK law through the Air Quality Standards (Amendment) Regulations 2016, which came into force on 31st December 2016 and the Environment (Miscellaneous Amendments) (EU Exit) Regulations 2020. Table 2 provides the UK Air Quality Objectives for NO_2 and PM.

³ The Air Quality Strategy for England, Scotland, Wales and Northern Ireland, Department for Environment, Food and Rural Affairs in partnership with the Scottish Executive, Welsh Assembly Government and Department of the Environment Northern Ireland, July 2007



Table 2 – UK Air Quality Objectives for Nitrogen Dioxide and Particulate Matter

Pollutant	Objective	Concentration measured as	Obligation
Particles (PM₁₀)	50µg/m ³ not to be exceeded more than 35 times a year	24 hour mean	All local authorities
	50µg/m ³ not to be exceeded more than 7 times a year	24 hour mean	Scotland only
	40µg/m ³	Annual mean	All local authorities
	10µg/m ³	Annual mean	Scotland only
Particles (PM_{2.5})	20µg/m ³ ^(a)	Annual Mean	England only (encouraged in Wales)
	10µg/m ³	Annual Mean	Scotland only
Nitrogen Dioxide (NO₂)	200µg/m ³ not to be exceeded more than 18 times a year	1 hour mean	All local authorities
	40µg/m ³	Annual mean	All local authorities

(a) The Environment (Miscellaneous Amendments) (EU Exit) Regulations 2020 is an amendment to the existing regulations and reduces the threshold for PM_{2.5} from 25 µg/m³ to 20 µg/m³.

2.3 Clean Air Strategy

The Clean Air Strategy⁴ was published in January 2019 and sets out the comprehensive action that is required from across all parts of government and society to tackle all sources of air pollution. New legislation will create a stronger and more coherent framework for action to tackle air pollution. This will be underpinned by new England-wide powers to control major sources of air pollution, in line with the risk they pose to public health and the environment, plus new local powers to take action in areas with an air pollution problem. These will support the creation of Clean Air Zones to lower emissions from all sources of air pollution, backed up with clear enforcement mechanisms.

2.4 London Local Air Quality Management (LLAQM)

At the core of LLAQM delivery are three pollutant objectives; these are: nitrogen dioxide (NO₂), particulate matter (PM₁₀) and sulphur dioxide (SO₂). All current Air Quality Management Areas (AQMAs) across the UK are declared for one or more of these pollutants, with NO₂ accounting for the majority. In Greater London, AQMAs are declared for NO₂ and PM₁₀ in equal proportions. It is a statutory requirement for local authorities to regularly review and assess air quality in their area and take action to improve air quality when objectives set out in regulation cannot be met.

⁴ Clean Air Strategy 2019, Department for Environment, Food and Rural Affairs, January 2019



2.4.1 London Borough of Hillingdon

The Council has declared an Air Quality Management Area (AQMA), which covers an area from the southern boundary north to the border defined by, the A40 corridor from the western borough boundary, east to the intersection with the Yeading Brook north until its intersection with the Chiltern-Marylebone railway line. The proposed development is located just outside of this AQMA, but vehicle movements generated by the proposed development could impact within the AQMA.

The proposed development is not located within an Air Quality Focus Area (AQFA). However, vehicle movements generated by the proposed development could impact the A40/South Ruislip AQFA.

3 PLANNING POLICY & GUIDANCE

3.1 National Planning Policy & Guidance

3.1.1 National Planning Policy Framework

On a national level, air quality can be a material consideration in planning decisions. The updated National Planning Policy Framework (NPPF) for England, released in December 2024, is considered a key part of the Government's reforms to make the planning system less complex and more accessible, to protect the environment and to promote sustainable growth.

Paragraph 110 within the NPPF states that the "*The planning system should actively manage patterns of growth in support of these objectives. Significant development should be focused on locations which are or can be made sustainable, through limiting the need to travel and offering a genuine choice of transport modes. This can help to reduce congestion and emissions, and improve air quality and public health. However, opportunities to maximise sustainable transport solutions will vary between urban and rural areas, and this should be taken into account in both plan-making and decision-making*".

It goes on to state in paragraph 199 that "*Planning policies and decisions should sustain and contribute towards compliance with relevant limit values or national objectives for pollutants, taking into account the presence of Air Quality Management Areas and Clean Air Zones, and the cumulative impacts from individual sites in local areas. Opportunities to improve air quality or mitigate impacts should be identified, such as through traffic and travel management, and green infrastructure provision and enhancement. So far as possible these opportunities should be considered at the plan-making stage, to ensure a strategic approach and limit the need for issues to be reconsidered when determining individual applications. Planning decisions should ensure that any new development in Air Quality Management Areas and Clean Air Zones is consistent with the local air quality action plan*".

3.1.2 Planning Practice Guidance (PPG)

The NPPF is supported by the national Planning Practice Guidance (PPG), which includes guiding principles on how planning can take account of the impacts of new development on air quality (updated November 2019). The PPG states that "*Defra carries out an annual national assessment of air quality using modelling and monitoring to determine compliance with EU Limit Values*" and "*It is important that the potential impact of new development on air quality is taken into account where the national assessment indicates that relevant limits have been exceeded or are near the limit*". The role of the local authorities is covered by the LAQM regime, with the PPG stating that local authority Air Quality Action Plans "*identify measures that will be introduced in pursuit of the objectives*". The PPG makes clear that "*Odour and dust can also be a planning concern, for example, because of the effect on local amenity*".

The PPG also states that "*Whether air quality is relevant to a planning decision will depend on the proposed development and its location. Concerns could arise if the development is likely to have an adverse effect on air quality in areas where it is already known to be poor, particularly if it could affect the implementation of air quality strategies and action plans and/or breach legal obligations (including those relating to the conservation of habitats and species). Air quality may also be a material consideration if the proposed development would be particularly sensitive to poor air quality in its vicinity*".

The PPG sets out the information that may be required in an air quality assessment, making clear that "*Assessments need to be proportionate to the nature and scale of development proposed and the potential impacts (taking into account existing air quality conditions), and because of this are likely to be locationally specific*". It also provides guidance on options for mitigating air quality impacts, as well as examples of the types of measures to be considered. It makes clear that "*Mitigation options will need to be locationally specific, will depend on the proposed development and need to be proportionate to the likely impact*".

3.1.3 Land-Use Planning & Development Control

In January 2017, Environmental Protection UK (EPUK) and the Institute of Air Quality Management (IAQM) produced guidance to ensure that air quality is adequately considered in the land-use planning and development control processes⁵.

The guidance document is particularly applicable to assessing the effect of changes in exposure of members of the public resulting from residential and mixed-use developments, especially those within urban areas where air quality is poorer. It is also relevant to other forms of development where a proposal could affect local air quality and for which no other guidance exists.

3.2 Local Planning Policy

3.2.1 London Environment Strategy

The Mayor's London Environment Strategy⁶, published in May 2018, contains a comprehensive list of measures to improve air quality. The aim is "*for London to have the best air quality of any major world city by 2050, going beyond legal requirements to protect human health and minimise inequalities*".

The strategy includes setting new targets for PM_{2.5} with the aim of meeting World Health Organization (WHO) guidelines by 2030, the establishment of zero emission zones from 2020, the introduction of an air quality positive development, the phasing out the use of fossil fuels

⁵ Land-Use Planning & Development Control: Planning for Air Quality. Guidance from Environmental Protection UK and the Institute of Air Quality Management for the consideration of air quality within the land-use planning and development control processes. EPUK & IAQM. January 2017

⁶ London Environment Strategy. Mayor of London. May 2018



to heat, cool and maintain London's buildings and the introduction of a low emission zone for non-road mobile machinery (NRMM).

3.2.2 The London Plan

The most recent London Plan was published in March 2021. Policy SI1 relates specifically to air quality and states the following:

"A - Development Plans, through relevant strategic, site-specific and area based policies, should seek opportunities to identify and deliver further improvements to air quality and should not reduce air quality benefits that result from the Mayor's or boroughs' activities to improve air quality.

B - To tackle poor air quality, protect health and meet legal obligations the following criteria should be addressed:

- 1) *Development proposals should not:*
 - a. *lead to further deterioration of existing poor air quality*
 - b. *create any new areas that exceed air quality limits, or delay the date at which compliance will be achieved in areas that are currently in exceedance of legal limits*
 - c. *create unacceptable risk of high levels of exposure to poor air quality.*
- 2) *In order to meet the requirements in Part 1, as a minimum:*
 - a. *Development proposals must be at least air quality neutral*
 - b. *Development proposals should use design solutions to prevent or minimise increased exposure to existing air pollution and make provision to address local problems of air quality in preference to post-design or retro-fitted mitigation measures*
 - c. *Major development proposals must be submitted with an Air Quality Assessment. Air quality assessments should show how the development will meet the requirements of B1*
 - d. *development proposals in Air Quality Focus Areas or that are likely to be used by large numbers of people particularly vulnerable to poor air quality, such as children or older people should demonstrate that design measures have been used to minimise exposure*

C - Masterplans and development briefs for large-scale development proposals subject to an Environmental Impact Assessment should consider how local air quality can be

improved across the area of the proposal as part of an Air Quality Positive approach. To achieve this a statement should be submitted demonstrating:

- a. *How proposals have considered ways to maximise benefits to local air quality, and*
- b. *What measures or design features will be put in place to reduce exposure to pollution, and how they will achieve this.*

D - In order to reduce the impact on air quality during the construction and demolition phase development proposals must demonstrate how they plan to comply with the Non-Road Mobile Machinery Low Emission Zone and reduce emissions from the demolition and construction of buildings following best practice guidance.

E - Development proposals should ensure that where emissions need to be reduced to meet the requirements of Air Quality Neutral or to make the impact of development on local air quality acceptable, this is done on-site. Where it can be demonstrated that emissions cannot be further reduced by on-site measures, off-site measures to improve local air quality may be acceptable, provided that equivalent air quality benefits can be demonstrated within the area affected by the development".

3.2.3 Supplementary Planning Guidance (SPG)

Control of Dust and Emissions during Construction and Demolition SPG

The Greater London Authority (GLA) released the “Control of Dust and Emissions during Construction and Demolition” SPG in July 2014⁷. The guidance seeks to reduce emissions of dust and PM₁₀ from construction and demolition activities in London. It also aims to manage emissions of nitrogen oxides (NOx) from construction and demolition machinery. The SPG:

- Provides more detailed guidance on the implementation of all relevant policies in the London Plan and the Mayor’s Air Quality Strategy to neighbourhoods, boroughs, developers, architects, consultants and any other parties involved in any aspect of the demolition and construction process;
- Sets out the methodology for assessing the air quality impacts of construction and demolition in London; and
- Identifies good practice for mitigating and managing air quality impacts that is relevant and achievable, with the overarching aim of protecting public health and the environment.

⁷ The Control of Dust and Emissions during Construction and Demolition SPG. Greater London Authority, July 2014

The principles of the SPG apply to all developments in London as their associated construction and demolition activity may all contribute to poor air quality unless properly managed and mitigated.

As stated in the SPG, the latest version of the Institute of Air Quality Management (IAQM) guidance should be used when undertaking an Air Quality Dust Risk Assessment (AQDRA). The latest IAQM guidance was released in January 2024⁸ and has been used for the AQDRA within this air quality statement.

Sustainable Design and Construction SPG

The Greater London Authority (GLA) released the “Sustainable Design and Construction” SPG in July 2014⁹. The SPG aims to support developers, local planning authorities and neighbourhoods to achieve sustainable development. It provides guidance on how to achieve the London Plan objectives effectively, supporting the Mayor’s aims for growth, including the delivery of housing and infrastructure.

3.3 Local Planning Policy

3.3.1 Hillingdon Local Plan

Policy EM8 “*Land, Water, Air and Noise*” of the Councils Local Plan: Part 1 - Strategic Policies (adopted November 2012) refers specifically to air quality and states the following:

All development should not cause deterioration in the local air quality levels and should ensure the protection of both existing and new sensitive receptors.

All major development within the Air Quality Management Area (AQMA) should demonstrate air quality neutrality (no worsening of impacts) where appropriate; actively contribute to the promotion of sustainable transport measures such as vehicle charging points and the increased provision for vehicles with cleaner transport fuels; deliver increased planting through soft landscaping and living walls and roofs; and provide a management plan for ensuring air quality impacts can be kept to a minimum.

The Council seeks to reduce the levels of pollutants referred to in the Government’s National Air Quality Strategy and will have regard to the Mayor’s Air Quality Strategy.

London Boroughs should also take account of the findings of the Air Quality Review and Assessments and Actions plans, in particular where Air Quality Management Areas have been designated.

The Council has a network of Air Quality Monitoring stations but recognises that this can be widened to improve understanding of air quality impacts. The Council may therefore require

⁸ IAQM Guidance on the assessment of dust from demolition and construction (January 2024, v2.2), Institute of Air Quality Management, London

⁹ Sustainable Design and Construction SPG. Greater London Authority, July 2014

new major development in an AQMA to fund additional air quality monitoring stations to assist in managing air quality improvements.

Policy DMEI 14 of the Councils Local Plan Part 2 - Development Management Policies also refers to air quality and states the following:

A) Development proposals should demonstrate appropriate reductions in emissions to sustain compliance with and contribute towards meeting EU limit values and national air quality objectives for pollutants.

B) Development proposals should, as a minimum:

- i) be at least "air quality neutral";*
- ii) include sufficient mitigation to ensure there is no unacceptable risk from air pollution to sensitive receptors, both existing and new; and*
- iii) actively contribute towards the improvement of air quality, especially within the Air Quality Management Area.*

4 ASSESSMENT METHODOLOGY

4.1 Construction Phase

Based on the “*Control of Dust and Emissions during Construction and Demolition*” SPG discussed in the previous section, the main air quality impacts that may arise during construction activities are:

- Dust deposition, resulting in the soiling of surfaces;
- Visible dust plumes, which are evidence of dust emissions;
- Elevated PM₁₀ concentrations, as a result of dust generating activities on site; and
- An increase in concentrations of airborne particles and nitrogen dioxide due to exhaust emissions from diesel powered vehicles and equipment on site.

In relation to the most likely impacts, the guidance states the following:


“The most common impacts are dust soiling and increased ambient PM₁₀ concentrations due to dust arising from activities on the site. Dust soiling will arise from the deposition of particulate matter in all size fractions.

Experience of assessing the exhaust emissions from on-site plant (also known as non-road mobile machinery or NRMM) and site traffic suggests that they are unlikely to make a significant impact on local air quality, and in the vast majority of cases they will not need to be quantitatively assessed”.

The guidance continues by providing an assessment procedure. This includes sub-dividing construction activities into four types to reflect their different potential impacts. These are as follows:

- Demolition;
- Earthworks;
- Construction; and
- Track out.

With regards to the proposed development the potential for dust emissions is assessed for each activity that is likely to take place. The assessment procedure assumes no mitigation measures are applied. The conditions with no mitigation thus form the baseline or “do-nothing” situation for a construction site. The assessment procedure uses the steps provided in the guidance and summarised in Figure 1.

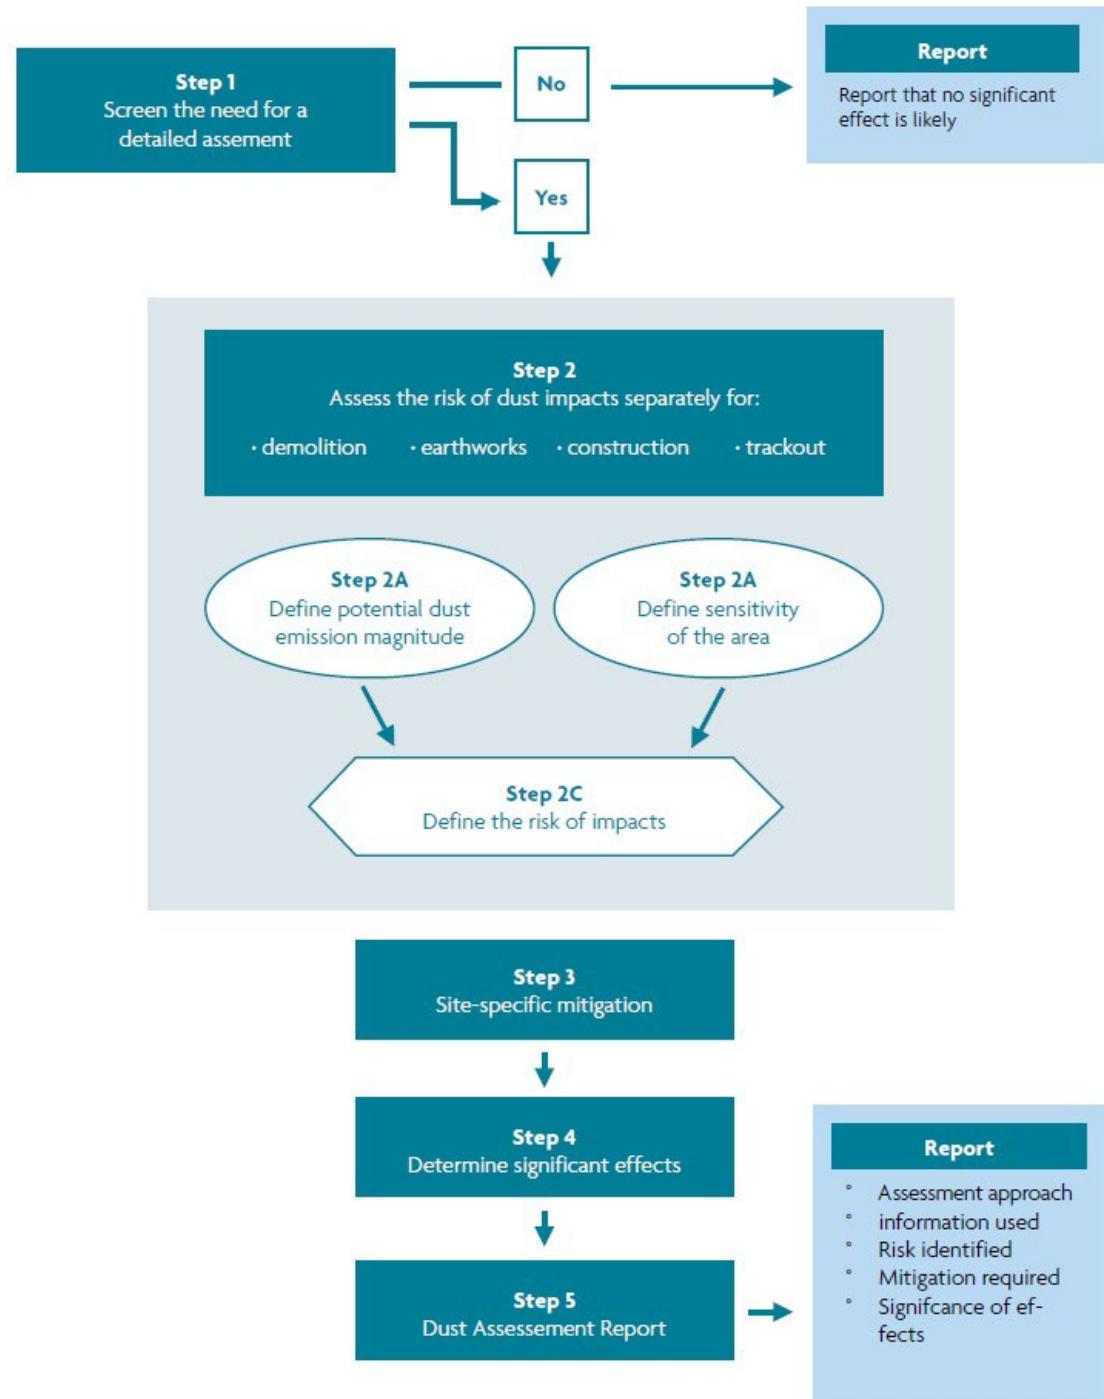Figure 1 – Dust Assessment Procedure

4.2 Operational Phase (Traffic Emissions)

4.2.1 Modelled Scenarios

Three scenarios have been modelled as part of this assessment. These are as follows:

1. Existing levels of air quality / model verification (2024);
2. Do-Minimum, future baseline only (2029); and
3. Do-Something, future baseline + proposed development (2029).

A future year has been chosen (2029) representing a full year when the development will be operational. Scenarios 2 and 3 will be used to determine the potential impact on existing and proposed receptors adjacent to the modelled road network as a result of increased traffic levels generated by the proposed development in 2029.

4.2.2 ADMS-Roads

Modelling the impact of traffic emissions on the proposed development will be undertaken using the latest version of the ADMS-Roads model¹⁰. ADMS-Roads is significantly more advanced than that of most other air dispersion models in that it incorporates the latest understanding of the boundary layer structure, and goes beyond the simplistic Pasquill-Gifford stability categories method with explicit calculation of important parameters. The model uses advanced algorithms for the height-dependence of wind speed, turbulence and stability to produce improved predictions.

4.2.3 Emission Factors

Defra and the Devolved Administrations have provided an updated Emission Factors Toolkit (Version 13.1) which incorporates updated NOx emissions factors and vehicle fleet information¹¹. These emission factors have been integrated into the latest ADMS-Roads modelling software.

The Institute for Air Quality Management (IAQM) released a position statement in July 2018 relating to uncertainties in vehicle NOx emissions within air quality assessments. It states the following:

"It has been known since around 2011 that nitrogen oxides (NOx) emissions from diesel vehicles have not declined as expected despite the introduction of increasingly more stringent European Union (EU) emission limits since the early 1990s. This, together with an increase in numbers of diesel cars and the use of emission control devices that increase the proportion of

¹⁰ Model Version: 5.1.0.2. Interface Version 5.1.0.12184 (26/08/2025)

¹¹ https://iaqm.defra.gov.uk/wp-content/uploads/2025/03/EFT2025_v13.0.xlsb

the nitrogen dioxide (NO₂) in the exhaust NOx, has resulted in annual mean concentrations of NO₂ remaining high, particularly at roadside locations".

The Institute for Air Quality Management (IAQM) released a position statement in July 2018 relating to uncertainties in vehicle NOx emissions within air quality assessments. It states the following:

"It has been known since around 2011 that nitrogen oxides (NOx) emissions from diesel vehicles have not declined as expected despite the introduction of increasingly more stringent European Union (EU) emission limits since the early 1990s. This, together with an increase in numbers of diesel cars and the use of emission control devices that increase the proportion of the nitrogen dioxide (NO₂) in the exhaust NOx, has resulted in annual mean concentrations of NO₂ remaining high, particularly at roadside locations".

However, the IAQM position statement has now been withdrawn and the following statement has been published by the IAQM:

"There is a growing body of evidence to suggest that the latest COPERT vehicle emission factors, which feed into the EFT (v9 and onwards), reflect the real-world NOx emissions more accurately.

It is judged that an exclusively vehicle emissions-based sensitivity test is no longer necessary.

On this basis, the EFT may be used for future year modelling with greater confidence when considering the per vehicle emission, provided that the assessment is verified against measurements made in the year 2016 or later".

On this basis, Scenario 2 has also been modelled with vehicle emission factors for 2029 derived from the latest Emission Factors Toolkit.

4.2.4 Traffic Data

Baseline traffic flows along the local roads are available from the London Atmospheric Emissions Inventory (LAEI)¹². Baseline data has been projected to 2029. Projection of traffic data has been undertaken using growth factors specific to the London Borough of Hillingdon, obtained from TEMPro¹³. The projected flow rates are provided in Table 3. It is assumed that the percentage HDV and speed will remain unchanged in future years.

The appointed transport consultants (Motion Consultants Ltd) have advised that the proposed development would generate 132 daily vehicle movements (18.2% HDVs). To undertake a worst-case assessment, the increase in +132 daily vehicle flows has been

¹² LAEI (2019), Greater London Authority

¹³ TEMPro (Trip End Model Presentation Program) version 8.0, Department for Transport

modelled across the entire network. As such, this does not take account of any directional flows.

Modelled speeds have also been provided in Table 3. These are based on the LAEI data. However, where a link approaches a junction a speed of 20 kph has been modelled (or the speed provided in Table 3, whichever is lower) to represent queuing traffic at a junction.

Table 3 – Annual Average Daily Traffic Flows, Percentage HDV and Speeds for Modelled Roads

Modelled Year/ Scenario	Link	Baseline Flows			Future Baseline + Development Flows		
		24-Hr AADT	% HGV	Average Speed (kph)	24-Hr AADT	% HGV	Average Speed (kph)
Modelled Baseline (2024)	A4180 West End Road (South)	38,664	5.4%	18			
	A4180 West End Road (North)	20,905	6.9%	27			
	Station Approach (South of Site)	22,557	2.6%	33			
	Victoria Road (West)	11,488	4.1%	19			
	The Fairway	9,578	1.7%	19			
	Victoria Road (East)	12,346	3.3%	17			
	Station Approach (North of Site)	22,557	2.6%	20			
Year of Completion (2029)	A4180 West End Road (South)	39,306	5.4%	18	39,438	5.4%	18
	A4180 West End Road (North)	21,252	6.9%	27	21,384	7.0%	27
	Station Approach (South of Site)	22,931	2.6%	33	23,063	2.7%	33
	Victoria Road (West)	11,679	4.1%	19	11,811	4.2%	19
	The Fairway	9,737	1.7%	19	9,869	2.0%	19
	Victoria Road (East)	12,551	3.3%	17	12,683	3.5%	17
	Station Approach (North of Site)	22,931	2.6%	20	23,063	2.7%	20

4.2.5 Street Canyons

A street canyon may be defined as a relatively narrow street with buildings on both sides, where the height of the buildings is generally greater than the width of the road. Street canyons may result in elevated pollutant concentrations from road traffic emissions due to a reduced likelihood of the pollutants becoming dispersed in the atmosphere. Street canyons have not been modelled as part of this assessment.

4.3 Background Concentrations

Background NO_x, NO₂ and PM₁₀ concentrations have been obtained from Defra¹⁴. These 1 km x 1 km grid resolution maps are derived from a base year of 2021 (for NO_x, NO₂, PM₁₀ and PM_{2.5} only), which are then projected to the relevant modelled years (2024 and 2029). Background concentrations of NO_x, NO₂, PM₁₀ and PM_{2.5} derived from Defra are provided in Table 4.

Table 4 – Background NO_x, NO₂, PM₁₀ and PM_{2.5} Concentrations

Pollutant	X	Y	2024	2029
NO ₂	511500	185500	13.9	11.7
NO _x			18.8	15.6
PM ₁₀			13.2	12.9
PM _{2.5}			8.0	7.6

4.4 Surface Roughness

A surface roughness of 1.5 metre has been used in the model. This value is provided by ADMS-Roads as a typical roughness length for large urban areas. This value has been used across the modelled domain.


4.5 Meteorological Data

Hourly sequential meteorological data from the London Heathrow Airport meteorological station has been used. Wind speed and direction data from the London Heathrow Airport meteorological station has been plotted as a wind rose in Figure 2.

¹⁴ <https://uk-air.defra.gov.uk/data/laqm-background-maps?year=2021>



Figure 2 – Wind Speed and Direction Data, London Heathrow Airport (2024)

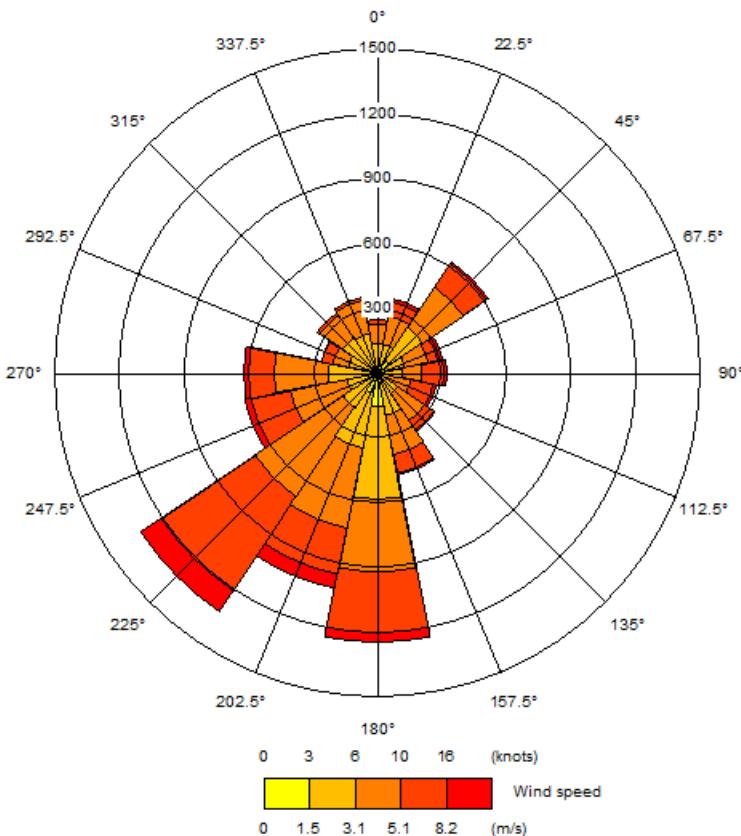

4.6 Model Output

4.6.1 NOx/NO₂ Relationship

The most NOx to NO₂ calculator¹⁵ has been used to determine NO₂ concentrations for this assessment, based on predicted NOx concentrations using ADMS-Roads. Converted NO₂ concentrations are initially compared against local monitoring data to verify the model output. If the model performance is considered unacceptable then the NOx concentrations are adjusted before conversion to NO₂.

4.6.2 Predicted Short Term Concentrations

As discussed in the introduction, it has not been possible to model the short-term impacts of NO₂ and PM₁₀. Research¹⁶ has indicated that the hourly NO₂ objective is unlikely to be exceeded at a roadside location where the annual mean NO₂ concentration is less than 60

¹⁵ https://laqm.defra.gov.uk/wp-content/uploads/2024/11/NOx_to_NO2_Calculator_v9.1-1.xlsx

¹⁶ Analysis of Relationship between 1-Hour and Annual Mean Nitrogen Dioxide at UK Roadside and Kerbside Monitoring Sites, Laxen and Marner, 2003



$\mu\text{g}/\text{m}^3$. A concentration of $60 \mu\text{g}/\text{m}^3$ has therefore been used to screen the likelihood of exceedance of the hourly mean NO_2 objective.

For PM_{10} , a relationship between the annual mean and the number of 24-hour mean exceedences has been devised and is as follows:

- No. 24-hour mean exceedences = $-18.5 + 0.00145 \times \text{annual mean}^3 + (206/\text{annual mean})$

This relationship has been applied to the modelled annual mean concentrations to estimate the number of 24-hourly exceedences.

4.6.3 Model Verification

Monitored NO_2 and PM_{10} concentrations from the following sites listed in Table 5 have been used for the purposes of model verification. These are the closest roadside monitoring sites to the proposed development.

Table 5 – Modelled Verification Locations

Monitoring ID	Location	Pollutant(s)	X	Y	Height (m)
HI1	Hillingdon 1 - South Ruislip	NO_2 and PM_{10}	510841	184914	2.5
HILL35	Grey Lamp-post, West End Road, to the south of Sidmouth Drive, outside Aroma House Chinese. HA4 6LR	NO_2	510055	186080	2.3

4.6.4 Receptor Locations

To assess the potential impact of the proposed development on existing receptors a number of receptors have been identified adjacent to the modelled road network. The receptors identified represent relevant exposure to air quality, such as residential properties, schools, hospitals or care homes. Not all receptors adjacent to a modelled road have been included in the assessment as the receptors selected will represent worst case locations e.g. closest to a road and/or modelled junction.

The modelled receptors represent the façade of the property and have been chosen given their proximity to the modelled road network. The location of these receptors, together with their height above ground level is provided in Table 6 and represented in Figure 3.


The proposed development has not been assessed in terms of exposure to poor air quality. This is because the closest receptors to the modelled network (Block 1) are hotel rooms and not relevant exposure to the annual mean air quality objectives, or are part of the existing building to be retained as part of the proposed scheme.



Table 6 – Modelled Receptor Locations

AQA ID	X	Y	Height (m)	AQA ID	X	Y	Height (m)
1	511321	185530	1.5	13	511338	185597	1.5
2	511087	185381	1.5	14	511340	185551	1.5
3	511106	185348	1.5	15	511507	185369	1.5
4	511188	185474	1.5	16	510924	185244	1.5
5	511218	185502	1.5	17	510948	185229	1.5
6	511260	185541	1.5	18	510751	185126	1.5
7	511282	185566	1.5	19	510702	185136	1.5
8	511260	185597	1.5	20	510691	185222	1.5
9	511212	185599	1.5	21	510728	185099	1.5
10	511313	185570	1.5	22	510762	185094	1.5
11	511321	185530	1.5	23	510780	185062	1.5
12	511087	185381	1.5				

Figure 3 – Modelled Receptor Locations

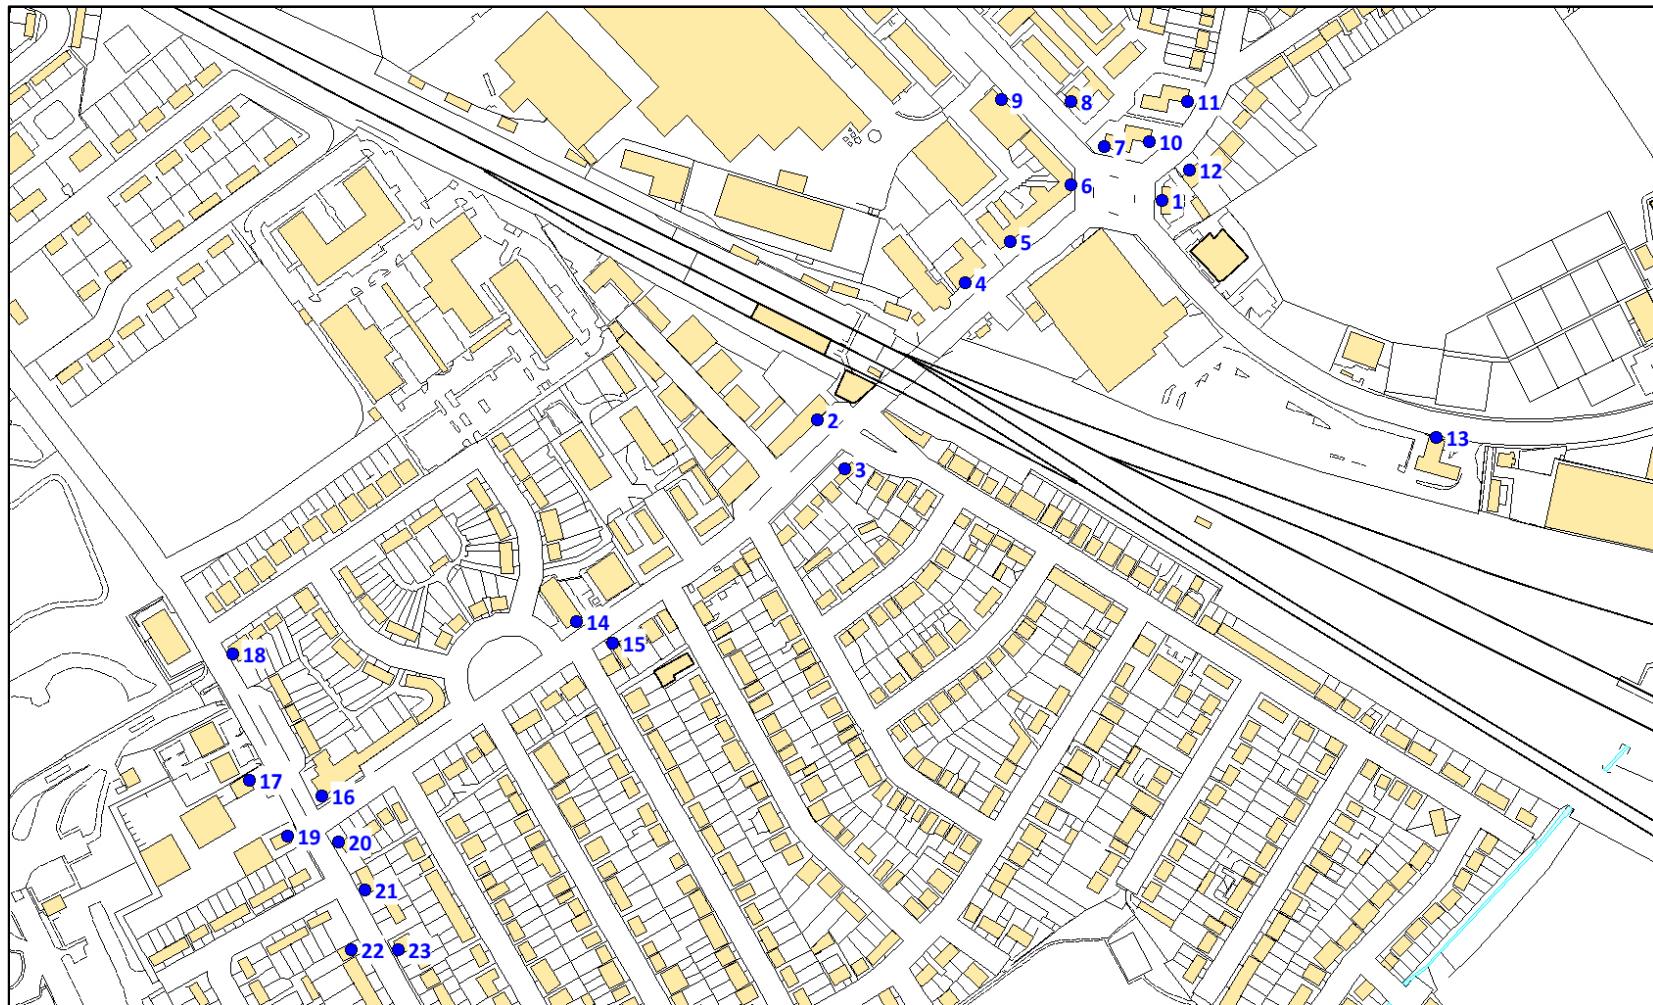

4.7 Significance Criteria

4.7.1 Construction Phase

The risk of dust arising in sufficient quantities to cause annoyance and/or health and/or ecological impacts should be determined using four risk categories: negligible, low, medium and high risk. A development is allocated to a risk category based on two factors:

- the scale and nature of the works, which determines the potential dust emission magnitude as small, medium or large (see Table 7); and
- the sensitivity of the area to dust impacts, which is defined as low, medium or high sensitivity (see Tables 8 and 9).

These two factors are combined to determine the risk of dust impacts with no mitigation applied (see Table 10). The risk category assigned to the development can be different for each of the four potential activities (demolition, earthworks, construction and track out).

Table 7 – Dust Emission Magnitude

Activity	Dust Emission Class		
	Large	Medium	Small
Demolition	Total building volume >75,000 m ³ , potentially dusty construction material (e.g. concrete), on-site crushing and screening, demolition activities >12 m above ground level	Total building volume 12,000 – 75 000m ³ , potentially dusty construction material, demolition activities 6-12 m above ground level	Total building volume <12,000 m ³ , construction material with low potential for dust release (e.g. metal cladding or timber), demolition activities <6m above ground, demolition during wetter months
Earthworks	Total site area >110,000 m ² , potentially dusty soil type (e.g. clay, which will be prone to suspension when dry due to small particle size), >10 heavy earth moving vehicles active at any one time, formation of bunds >6 m in height	Total site area 18,000 m ² – 110,000 m ² , moderately dusty soil type (e.g. silt), 5-10 heavy earth moving vehicles active at any one time, formation of bunds 3m - 6m in height	Total site area <18,000 m ² , soil type with large grain size (e.g. sand), <5 heavy earth moving vehicles active at any one time, formation of bunds <3 m in height
Construction	Total building volume >75,000 m ³ , piling, on site concrete batching; sandblasting	Total building volume 12,000 m ³ – 75,000 m ³ , potentially dusty construction material (e.g. concrete), on site concrete batching	Total building volume <12,000 m ³ , construction material with low potential for dust release (e.g. metal cladding or timber)
Track out	>50 HDV (>3.5t) outward movements in any one day, potentially dusty surface material (e.g. high clay content), unpaved road length >100 m	20-50 HDV (>3.5t) outward movements in any one day, moderately dusty surface material (e.g. high clay content), unpaved road length 50 m – 100 m	<20 HDV (>3.5t) outward movements in any one day, surface material with low potential for dust release, unpaved road length <50 m

Table 8 – Sensitivity of the Area to Dust Soiling Effects on People and Property

Sensitivity of the Area to Dust Soiling Effects					
Receptor Sensitivity	Number of Receptors	Distance from the Source (m)			
		<20	<50	<100	<350
High	>100	High	High	Medium	Low
	10-100	High	Medium	Low	Low
	1-10	Medium	Low	Low	Low
Medium	>1	Medium	Low	Low	Low
Low	>1	Low	Low	Low	Low

Table 9 – Sensitivity of the Area to Human Health Impacts

Sensitivity of the Area to Human Health Effects						
Receptor Sensitivity	Annual Mean PM ₁₀ Concentration	Number of Receptors	Distance from the Source (m)			
			<20	<50	<100	<200
High	>32 µg/m ³	>100	High	High	High	Medium
		10-100	High	High	Medium	Low
		1-10	High	Medium	Low	Low
	28-32 µg/m ³	>100	High	High	Medium	Low
		10-100	High	Medium	Low	Low
		1-10	High	Medium	Low	Low
	24-28 µg/m ³	>100	High	Medium	Low	Low
		10-100	High	Medium	Low	Low
		1-10	Medium	Low	Low	Low
Medium	-	>100	Medium	Low	Low	Low
		10-100	Low	Low	Low	Low
		1-10	Low	Low	Low	Low
Low	-	>1	Low	Low	Low	Low

Table 10 – Risk of Dust Impacts

Construction Activity	Sensitivity of Area	Dust Emission Magnitude		
		Large	Medium	Small
Demolition	High	High Risk	Medium Risk	Medium Risk
	Medium	High Risk	Medium Risk	Low Risk
	Low	Medium Risk	Low Risk	Negligible
Earthworks	High	High Risk	Medium Risk	Low Risk
	Medium	Medium Risk	Medium Risk	Low Risk
	Low	Low Risk	Low Risk	Negligible
Construction	High	High Risk	Medium Risk	Low Risk
	Medium	Medium Risk	Medium Risk	Low Risk
	Low	Low Risk	Low Risk	Negligible
Track out	High	High Risk	Low Risk	Low Risk
	Medium	Medium Risk	Low Risk	Negligible
	Low	Low Risk	Low Risk	Negligible

4.7.2 Operational Phase

The guidance released by Environmental Protection UK provides steps for a Local Authority to follow to assess the significance of air quality impacts of a development proposal. This procedure, shown in Figure 4, has also been applied to the modelled results.


The joint guidance released by EPUK and the IAQM provides impact descriptors for individual receptors. These descriptors are provided in Table 11.

Table 11 – Impact Descriptors for Individual Receptors

Long term average concentration at receptor in assessment year	% Change in concentration relative to AQ objective			
	1%	2-5%	6-10%	>10%
75% or less of AQ objective	Negligible	Negligible	Slight	Moderate
76-94% of AQ objective	Negligible	Slight	Moderate	Moderate
95-102% of AQ objective	Slight	Moderate	Moderate	Substantial
103-109% of AQ objective	Moderate	Moderate	Substantial	Substantial
110% or more of AQ objective	Moderate	Substantial	Substantial	Substantial



Figure 4 – Assessing the Significance of Air Quality Impacts of a Development Proposal

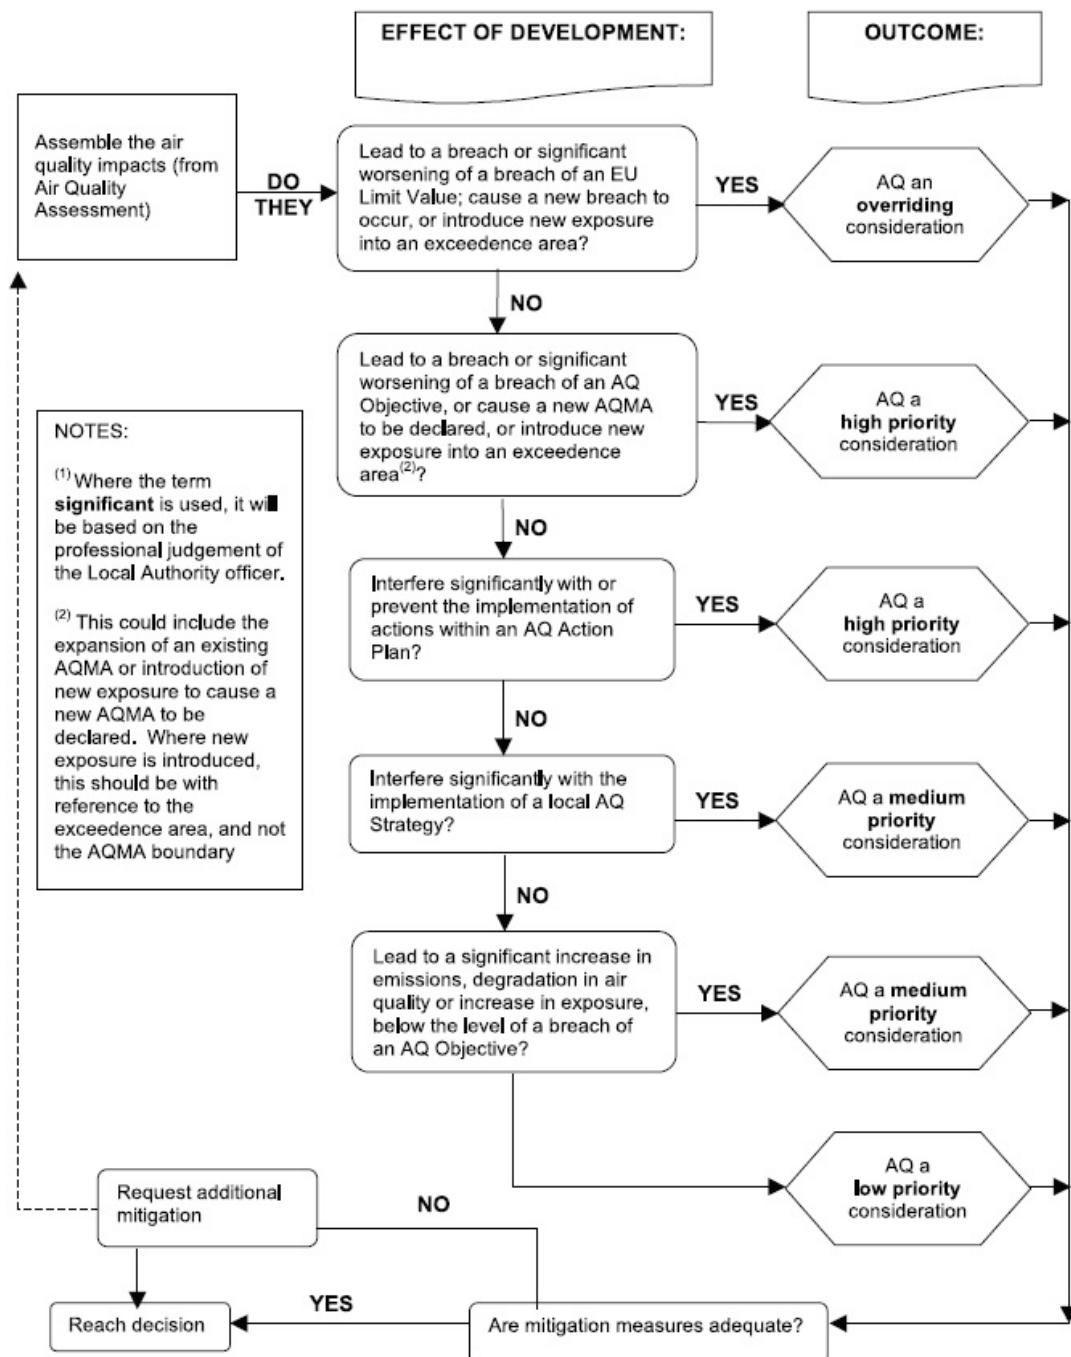

5 AIR QUALITY ASSESSMENT

5.1 Impact from Construction Activities

The assessment of construction activities has focused on demolition, earthworks, construction and track out activities at the site. Using the criteria provided in Table 7 the dust emission magnitude for each activity is as follows:

- Demolition = Medium (Total building volume 12,000 – 75 000m³);
- Earthworks = Small (Total site area <18,000 m²);
- Construction = Medium (Total building volume 12,000 m³ – 75,000 m³); and
- Track out = Medium (20-50 HDV (>3.5t) outward movements in any one day).

The sensitivity of the surrounding area to dust soiling and human health (Table 12) is then defined based on the criteria in Tables 8 and 9, which includes the number of medium or highly sensitive receptors that fall within a certain distance of the proposed construction phase (see Figure 5). There are no designated ecological receptors within 50 metres of the proposed development.

Table 12 – Sensitivity of the Surrounding Area

Potential Impact	Comments	Sensitivity
Dust Soiling	There are >1 medium sensitivity receptors e.g. places of work, within 20 metres of the proposed development.	Medium
Human Health	There are between 1 and 10 medium sensitivity receptors e.g. places of work, within 20 metres of the proposed development.	Medium

The dust emission magnitudes and sensitivity of the surrounding area are combined to determine the risk of dust impacts. These are summarised in Table 13.


Table 13 – Summary of Dust Risk

Potential Impact	Risk			
	Demolition	Earthworks	Construction	Track out
Dust Soiling	Medium Risk	Low Risk	Medium Risk	Low Risk
Human Health	Medium Risk	Low Risk	Medium Risk	Low Risk

It should also be noted that the likelihood of an adverse impact occurring is correlated to wind speed and wind direction. As such, unfavourable wind speeds and wind directions must occur at the same time as a dust generating activity to generate an adverse impact. The overall impacts also assume that the dust generating activities are occurring over the entirety of the site meaning that as an activity moves further away from a potential receptor the magnitude and significance of the impact will be further reduced.



Figure 5 –Distance from the Proposed Development

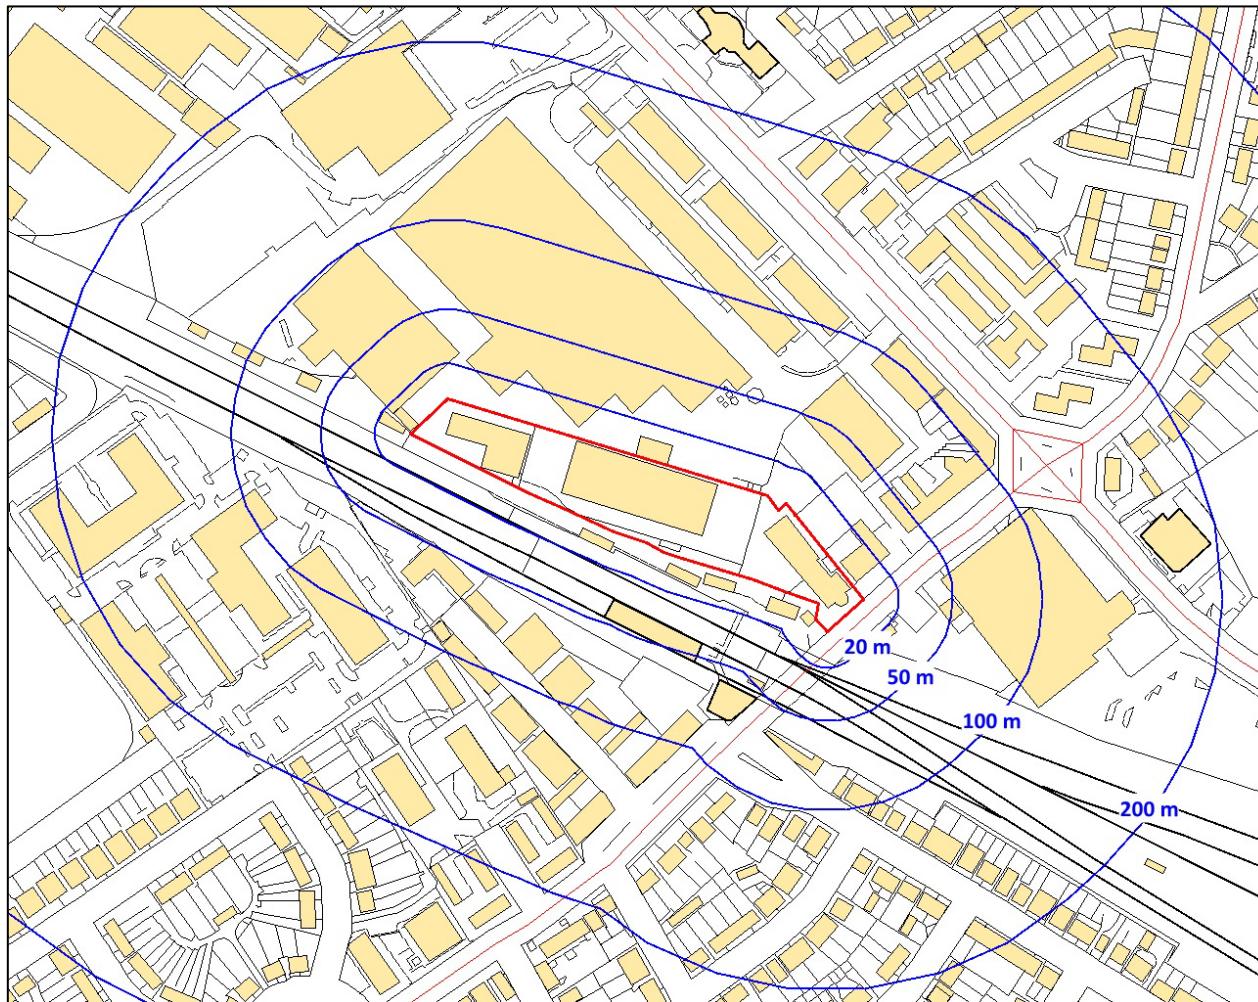

5.2 Impact of Vehicle Emissions

5.2.1 Model Verification

Using the guidance provided within the London Local Air Quality Management (LLAQM) Technical Guidance (TG19), the modelled output has been verified against the monitoring data obtained from the sites listed in Table 6. The following tables provide a summary of the model verification process for NOx/NO₂ and PM₁₀ concentrations.

Table 14 – Comparison of Modelled and Monitored NO₂ and PM₁₀ Concentrations (µg/m³), 2024

Verification Location	Modelled Concentration	Monitored Concentration	Difference [(modelled - monitored)/monitored] x100
NO₂			
HI1	17.3	20.0	-13.7%
HILL35	16.2	19.8	-18.1%
PM₁₀			
HI1	14.7	18.0	-18.6%

As described in the Technical Guidance (TG19), to provide more confidence in the model predictions and the decisions based on these, the majority of results should be within $\pm 25\%$ (ideally $\pm 10\%$) of the monitored concentrations. To improve the confidence in modelled NO₂ concentrations across the modelled domain the model output has been adjusted. This is described further in the next section.

Modelled PM10 concentrations have been adjusted by a factor of 1.2.

5.2.2 Model Adjustment

To undertake model adjustment, it is first necessary to derive the monitored and modelled road contributions of NOx (excluding background). The modelled road contribution NOx is taken directly from the ADMS-Roads output before it has been converted to NO₂ using the NOx to NO₂ calculator described in Section 4.6.1. The NOx to NO₂ calculator can also be used to derive monitored road contributions of NOx from NO₂ diffusion tube results. A summary of these calculations is provided in Table 15.

Table 15 – Monitored NOx and NO₂ concentrations, 2024

Site ID	Monitored Total NO ₂	Defra Background NO ₂	Monitored road contribution NO ₂ (total – background)	Monitored road contribution NOx (total – background)	Modelled road contribution NOx (excludes background)	Ratio of monitored road contribution NOx / modelled road contribution NOx
HI1	20.0	13.9	6.1	13.6	7.3	1.9
HILL35	19.8	13.9	5.9	13.1	5.0	2.6
Average						2.24

Once the monitored and modelled road contributions of NOx (excluding background) have been derived the contributions of NOx are compared and a ratio derived. In this case the ratio is 2.24 and this factor has been used to adjust the modelled road contribution of NOx. This is shown in Table 16.

Table 16 – Adjustment of Modelled NOx Contributions, 2024

Site ID	Adjustment factor for modelled road contribution	Adjusted modelled road contribution NOx	Modelled total NO ₂ (based on empirical NOx/NO ₂ relationship)	Monitored total NO ₂	% Difference [(modelled – monitored) / monitored] x 100
HI1	2.24	16.4	21.2	20.0	6.0%
HILL35	2.24	11.2	19.0	19.8	-4.1%

Following adjustment of the modelled NOx concentrations by a factor of 2.24 the total NO₂ concentration at the model verification location has been calculated using the method described in Section 4.6.1. The revised NO₂ concentration, shown in Table 16, indicates a more acceptable model performance when compared against the monitored NO₂ concentrations. As such, an adjustment factor of 2.24 has been applied to all modelled NOx concentrations across the model domain before conversion to NO₂.

5.2.3 Nitrogen Dioxide

Predicted annual mean concentrations for NO₂ at existing receptors using all modelled scenarios are provided in Table 17. The change in predicted concentrations at existing receptors has also been provided, together with the impact descriptor for each receptor.

Table 17 – Change in Predicted Annual Mean NO₂ Concentrations (µg/m³), Existing Receptors, 2029

Receptor	Future Baseline	Future Baseline + Development Flows	% of AQ Objective	Change	% Change Relative to AQO	Impact Descriptor
1	12.8	12.9	32.3%	0.1	0.25%	Negligible
2	12.5	12.5	31.3%	0.0	0.00%	
3	12.7	12.7	31.8%	0.0	0.00%	
4	12.7	12.7	31.8%	0.0	0.00%	
5	12.6	12.7	31.8%	0.1	0.25%	
6	12.8	12.9	32.3%	0.1	0.25%	
7	12.8	12.8	32.0%	0.0	0.00%	
8	12.5	12.5	31.3%	0.0	0.00%	
9	12.5	12.6	31.5%	0.1	0.25%	
10	12.6	12.6	31.5%	0.0	0.00%	
11	12.4	12.4	31.0%	0.0	0.00%	
12	12.6	12.6	31.5%	0.0	0.00%	
13	12.7	12.7	31.8%	0.0	0.00%	
14	12.8	12.8	32.0%	0.0	0.00%	
15	13.0	13.0	32.5%	0.0	0.00%	
16	14.1	14.1	35.3%	0.0	0.00%	
17	12.8	12.8	32.0%	0.0	0.00%	
18	13.6	13.6	34.0%	0.0	0.00%	
19	13.4	13.4	33.5%	0.0	0.00%	
20	15.1	15.2	38.0%	0.1	0.25%	
21	14.8	14.8	37.0%	0.0	0.00%	
22	13.8	13.8	34.5%	0.0	0.00%	
23	14.6	14.7	36.8%	0.1	0.25%	
Objective	40.0					

When comparing the predicted NO₂ concentrations in 2029 with and without the proposed development the impact is considered negligible at all modelled receptor locations.

Nitrogen dioxide also has an hourly objective of 200 µg/m³ not to be exceeded more than 18 times in one year. However, the hourly mean concentration has not been calculated directly by ADMS Roads. Given that predicted NO₂ concentrations in 2024 and 2029 are below 60 µg/m³ at all modelled receptors the likelihood of the short-term objective for NO₂ being exceeded is considered low.

5.2.4 Particulate Matter

Predicted annual mean concentrations for PM₁₀ at existing and proposed receptors using are provided in Table 18. The change in predicted concentrations at existing receptors has also been provided, together with the impact descriptor for each receptor.

Table 18 – Change in Predicted Annual Mean PM₁₀ Concentrations (µg/m³), Existing Receptors, 2029

Receptor	Future Baseline	Future Baseline + Development Flows	% of AQ Objective	Change	% Change Relative to AQO	Impact Descriptor
1	16.1	16.1	40.3%	0.0	0.00%	Negligible
2	16.0	16.0	40.0%	0.0	0.00%	
3	16.2	16.2	40.5%	0.0	0.00%	
4	16.0	16.0	40.0%	0.0	0.00%	
5	16.0	16.0	40.0%	0.0	0.00%	
6	16.1	16.1	40.3%	0.0	0.00%	
7	16.0	16.0	40.0%	0.0	0.00%	
8	15.9	15.9	39.8%	0.0	0.00%	
9	15.9	15.9	39.8%	0.0	0.00%	
10	16.0	16.0	40.0%	0.0	0.00%	
11	15.9	15.9	39.8%	0.0	0.00%	
12	16.0	16.0	40.0%	0.0	0.00%	
13	16.0	16.0	40.0%	0.0	0.00%	
14	16.2	16.2	40.5%	0.0	0.00%	
15	16.3	16.3	40.8%	0.0	0.00%	
16	16.7	16.7	41.8%	0.0	0.00%	
17	16.0	16.0	40.0%	0.0	0.00%	
18	16.4	16.4	41.0%	0.0	0.00%	
19	16.3	16.3	40.8%	0.0	0.00%	
20	17.2	17.2	43.0%	0.0	0.00%	
21	16.9	17.0	42.5%	0.1	0.25%	
22	16.5	16.5	41.3%	0.0	0.00%	
23	16.9	16.9	42.3%	0.0	0.00%	
Objective	40.0					

When comparing the predicted PM₁₀ concentrations in 2029 with and without the proposed development the impact is considered negligible at all modelled receptors.

The ADMS predictions for annual mean PM₁₀ concentrations in 2024 and 2029 indicate that the annual mean objective (40 µg/m³) would be achieved at all the modelled receptor locations. In addition, the maximum number of days when PM₁₀ concentrations are more than 50 µg/m³ is 1, less than the 35 exceedences allowed in the regulations.

Predicted annual mean concentrations for PM_{2.5} at existing and proposed receptors using are provided in Table 19. The change in predicted concentrations at existing receptors has also been provided, together with the impact descriptor for each receptor.

Table 19 – Change in Predicted Annual Mean PM_{2.5} Concentrations (µg/m³), Existing Receptors, 2029

Receptor	Future Baseline	Future Baseline + Development Flows	% of AQ Objective	Change	% Change Relative to AQO	Impact Descriptor
1	7.9	7.9	39.5%	0.0	0.00%	Negligible
2	7.8	7.8	39.0%	0.0	0.00%	
3	7.9	7.9	39.5%	0.0	0.00%	
4	7.8	7.8	39.0%	0.0	0.00%	
5	7.8	7.8	39.0%	0.0	0.00%	
6	7.9	7.9	39.5%	0.0	0.00%	
7	7.8	7.9	39.5%	0.1	0.50%	
8	7.8	7.8	39.0%	0.0	0.00%	
9	7.8	7.8	39.0%	0.0	0.00%	
10	7.8	7.8	39.0%	0.0	0.00%	
11	7.8	7.8	39.0%	0.0	0.00%	
12	7.8	7.8	39.0%	0.0	0.00%	
13	7.8	7.8	39.0%	0.0	0.00%	
14	7.9	7.9	39.5%	0.0	0.00%	
15	8.0	8.0	40.0%	0.0	0.00%	
16	8.1	8.1	40.5%	0.0	0.00%	
17	7.8	7.8	39.0%	0.0	0.00%	
18	8.0	8.0	40.0%	0.0	0.00%	
19	8.0	8.0	40.0%	0.0	0.00%	
20	8.3	8.3	41.5%	0.0	0.00%	
21	8.2	8.3	41.5%	0.1	0.50%	
22	8.0	8.0	40.0%	0.0	0.00%	
23	8.2	8.2	41.0%	0.0	0.00%	
Objective	20.0					

When comparing the predicted PM_{2.5} concentrations in 2029 with and without the proposed development the impact is considered negligible at all modelled receptors.

6 AIR QUALITY NEUTRAL ASSESSMENT

6.1 Introduction

The air quality neutral assessment has followed the methodology outlined in the Air Quality Neutral guidance¹⁷. Within these documents, benchmarks have been provided in relation to building and transport emissions, together with a methodology for calculating the building and transport related emissions for a particular development.

6.2 Transport Emissions

The Transport Emission Benchmark (TEB) for the development is provided in Table 20. The proposed development will generate 33 daily vehicle movements (12,045 trips per annum) from the residential elements and 17 daily vehicle movements (6,205 trips per annum) from the hotel. Combined, this is lower than the TEB for the development, as shown in Table 20. As such, the development is considered air quality neutral in relation to the transport emissions.

Table 20 – Transport Emission Benchmark (TEB)

Land Use	No. of Units or Floor Area (m ²)	Benchmark Trip Rate for Outer London	Total Benchmark Trip Rate (per annum)
Residential	114 units	447 annual trips per dwelling	50,958
Hotel	440 m ²	6.9 annual trips per m ²	3,036
TEB for Development			53,994

6.3 Building Emissions

All heating and hot water will be provided using air source heat pumps (ASHP). As such, the air quality neutral assessment for building emissions has not been undertaken.

¹⁷ London Plan Guidance: Air Quality Neutral. GLA, February 2023



7 CONCLUSIONS AND RECOMMENDATIONS

7.1 Impact from Construction Activities

A qualitative assessment of dust levels associated with the proposed development has been carried out. The impact of dust soiling and PM₁₀ can be reduced to negligible through appropriate mitigation measures, which are listed in Table 21 and are applicable to a medium-risk site. Implementation of these Best Practice Measures will help reduce the impact of the construction activities.

With these mitigation measures enforced, the likelihood of nuisance dust episodes occurring at those receptors adjacent to the development are considered low. Notwithstanding this, the developer should take into account the potential impact of air quality and dust on occupational exposure standards (in order to minimise worker exposure) and breaches of air quality objectives that may occur outside the site boundary. Monitoring is not recommended at this stage, however, continuous visual assessment of the site should be undertaken and a complaints log maintained in order determine the origin of a particular dust nuisance. Keeping an accurate and up to date complaints log will isolate particular site activities to a nuisance dust episode and help prevent it from reoccurring in the future.

7.2 Impact of Vehicle Emissions

The change in predicted NO₂, PM₁₀ and PM_{2.5} concentrations at existing receptors in 2029 following completion of the proposed development is considered negligible at all modelled receptors. Overall, using the flow chart presented in Figure 4, air quality is a low priority consideration with regards to the impact of the proposed development.

7.3 Air Quality Neutral Assessment

The air quality neutral assessment has concluded that the proposed development will meet building and transport emission benchmarks. As such, no mitigation measures are required to reduce these emissions.

7.4 Overall Conclusion

Based on the outcome of this assessment the current proposals are considered acceptable in terms of the potential impact on local air quality.

The development complies with Policies EM8 and DMEI 14 of the Councils Local Plan.

Table 21 – Mitigation of Construction Activities

Construction Activity	Mitigation Measures
Site Management	Develop and implement a stakeholder communications plan that includes community engagement before work commences on site
	Develop a Dust Management Plan.
	Display the name and contact details of person(s) accountable for air quality pollutant emissions and dust issues on the site boundary.
	Display the head or regional office contact information.
	Record and respond to all dust and air quality pollutant emissions complaints.
	Make a complaints log available to the local authority when asked.
	Carry out regular site inspections to monitor compliance with air quality and dust control procedures, record inspection results, and make an inspection log available to the local authority when asked.
	Increase the frequency of site inspections by those accountable for dust and air quality pollutant emissions issues when activities with a high potential to produce dust and emissions and dust are being carried out, and during prolonged dry or windy conditions.
	Record any exceptional incidents that cause dust and air quality pollutant emissions, either on or off the site, and the action taken to resolve the situation is recorded in the log book.
Preparing and Maintaining the Site	Plan site layout: machinery and dust causing activities should be located away from receptors.
	Erect solid screens or barriers around dust activities or the site boundary that are, at least, as high as any stockpiles on site.
	Fully enclosure site or specific operations where there is a high potential for dust production and the site is active for an extensive period.
	Avoid site runoff of water or mud.
	Keep site fencing, barriers and scaffolding clean using wet methods.
	Remove materials from site as soon as possible.
	Cover, seed or fence stockpiles to prevent wind whipping.
Operating Vehicle/Machinery and Sustainable Travel	Ensure all on-road vehicles comply with the requirements of the London LEZ and ULEZ
	Ensure all non-road mobile machinery (NRMM) comply with the relevant standards
	Ensure all vehicles switch off engines when stationary – no idling vehicles.
	Avoid the use of diesel or petrol powered generators and use mains electricity or battery powered equipment where possible.
	Produce a Construction Logistics Plan to manage the sustainable delivery of goods and materials.
	Implement a Travel Plan that supports and encourages sustainable travel (public transport, cycling, walking, and car-sharing).
Operations	Only use cutting, grinding or sawing equipment fitted or in conjunction with suitable dust suppression techniques such as water sprays or local extraction, e.g. suitable local exhaust ventilation systems.
	Ensure an adequate water supply on the site for effective dust/particulate matter mitigation (using recycled water where possible).
	Use enclosed chutes, conveyors and covered skips.
	Minimise drop heights from conveyors, loading shovels, hoppers and other loading or handling equipment and use fine water sprays on such equipment wherever appropriate.
	Ensure equipment is readily available on site to clean any dry spillages, and clean up spillages as soon as reasonably practicable after the event using wet cleaning methods.
Waste Management	Reuse and recycle waste to reduce dust from waste materials
	Avoid bonfires and burning of waste materials.