BOUNDRY LINE FENCING

2 No Betula pendula

3 No Ahemobe hybrida 'Honorine Jobert' 50%
3No Asplenum Solopendrium 50%

C

D

E

INTERNAL FENCING BETWEEN THE PROPERTIES

Amelanchier lamarckii

1 No Betula pendula

3No Ahemobe hybrida 'Honorine Jobert' 50%
3No Asplenum Solopendrium 50%

INTERNAL FENCING BETWEEN THE PROPERTIES

1 No Amelanchier lamarckii

3 No Ahemobe hybrida 'Honorine Jobert' 50%
3No Asplenum Solopendrium 50%

1025

3255

INTERNAL FENCING BETWEEN THE PROPERTIES

Amelanchier lamarckii

3 No Ahemobe hybrida 'Honorine Jobert' 50%
3No Asplenum Solopendrium 50%

1 No Betula pendula

SHARED PERMEABLE PAVED DRIVEWAY

Refer to Planning approved drawing for parking layout

1 No Sorbus Aria

12 No Skimmia confusa 'Kew Green"

15 No Prunus Laurocerasus "Zabeliana" along the fence perimenter

1 No Malus Sylvestris

Fence Panel with Conc Post
1800
Gravel Board - Concrete
225

Internal Fencing Detail between the proposed Front&Rear developments

PAVEMENT

Yew Avenue

PAVEMENT

C Soft Landscape (TURFF AREA) - Medallion(R) turf by Rolawn or similar
D Car parking Driveway area - Permeable Paving- Refer to spacification.
E Hard Landscape- Conservation blocks with 6mm gravel joints 400x400x60mm gray- 3.6sq.m / house

Fence Panel with Conc Post
1800
Gravel Board - Concrete
225

Boundry Fencing Detail

Boundry Line of 80&82 Otterfield Rd
Boundry Line of 84&86 Otterfield Rd

METAL GATE Details:
Max height =2m

SITE BOUNDRY LINE

2 No Malus Sylvestris

4 No Rhamnus Cathartica 5%
4 No Rhamnus frangula 5%
14 No Rosa Canina 30%
4 No Rubus frutcosus 5%
12 No Sambucus nigra 25%
14 No Viburnum opulus 30%

1 No Amelanchier lamarckii

21No Prunus Laurocerasus "Zabeliana" along the fence perimenter

1 No Sorbus Aria

18 No Skimmia confusa 'Kew Green"

0 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

project	drawn	audited	scale	date
82-84 Otterfield Road Uxbridge	MC	DIS	1:100 @ A3	I
drg title: Proposed Landscape Scheme Yew Avenue	job no. 5015		drg.no. YEW 01	rev B

FILE: XREF's:

EXTEND OF BOUNDRY LINE FENCING

LOWERED KERB LINE

4 No Liriope muscari 'Munro White'

2No Malus Domestica

8 No Liriope muscari 'Munro White'

1No Malus Domestica

4 No Liriope muscari

BOUNDRY LINE FENCING

INTERNAL FENCING BETWEEN THE PROPERTIES

INTERNAL FENCING BETWEEN THE PROPERTIES

INTERNAL FENCING BETWEEN THE PROPERTIES

D

C

4No Ahemobe hybrida 'Honorine Jobert' 50%
4No Asplenum Solopendrium 50%

1No Malus Sylvestris

1 No Betula pendula

3No Ahemobe hybrida 'Honorine Jobert' 50%
3No Asplenum Solopendrium 50%

2 No Betula pendula




2

notes

- The contractor is responsible for checking dimensions, tolerances and references. Any discrepancy to be verified with the Architect before proceeding with the works.
- Where an item is covered by drawings to different scales the larger scale drawing is to be worked to.
- Do not scale drawing. Figured dimensions to be worked to in all cases.

CDM Regulations 2007

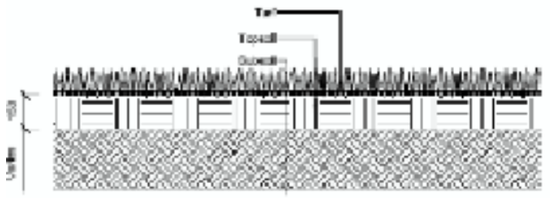

0 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

project: 82-84 Otterfield Road Uxbridge	drawn: MC	audited: DIS	scale: 1:100 @ A3	date: I
drg title: Proposed Landscape Scheme Otterfield Rd	job no.: 5015		drg.no.: YEW 02	rev: B

FILE: XREFs: